

Pinnacle Impact Series


Direct Set

Options



Direct Set Shapes Chart

Units must be ordered by FRAME DIMENSIONS only

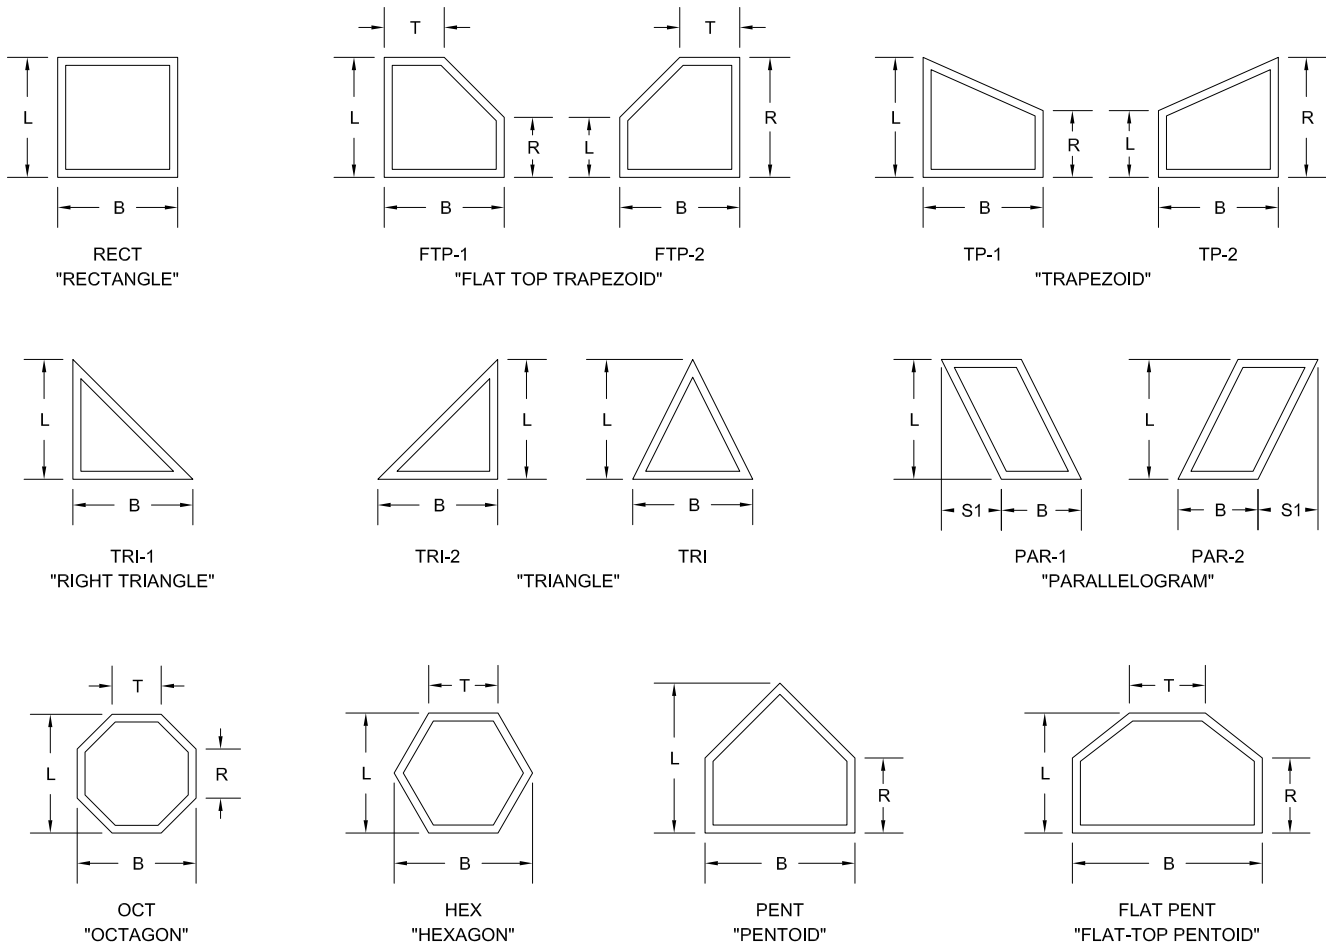

Size Limitations


1. The maximum dimension is 60" x 102" or 102" x 60"
2. The minimum base dimension is 14 inches.
3. The minimum leg dimension is 6 inches.
4. The maximum Square Footage allowed is 42 Square Feet.
5. The minimum pitch is a 5/12 angle.
6. The Aspect Ratio is 7 to 1 maximum.
7. Any one unit can not have glass smaller than 8" x 12".
8. Some spacer may be visible on units with tight angles.

Pinnacle Impact Series


CLAD DIRECT SET

SECTION DETAILS: DIRECT GLAZE


SCALE: 3" = 1'-0"

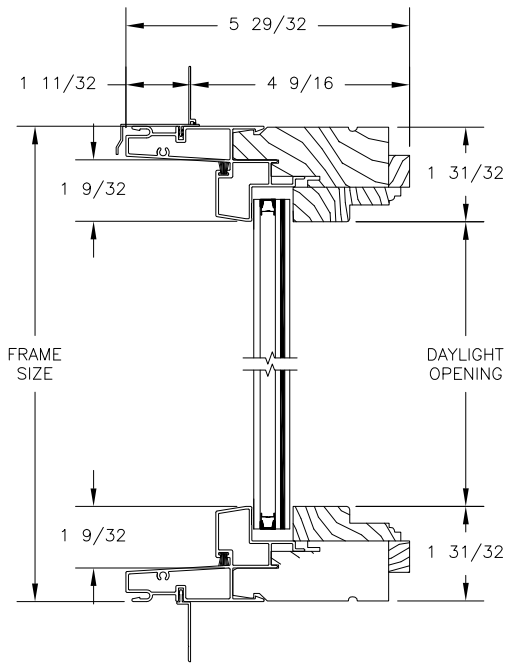

HEAD JAMB & SILL

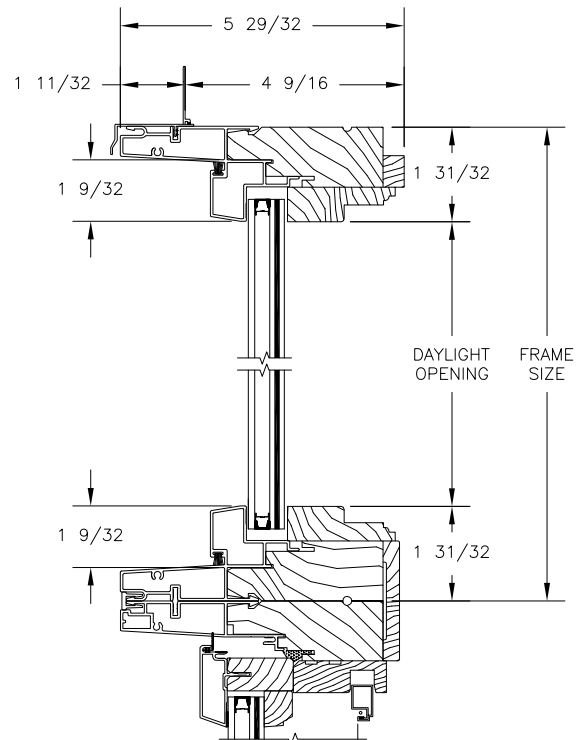

TRANSOM
HEAD JAMB & SILL

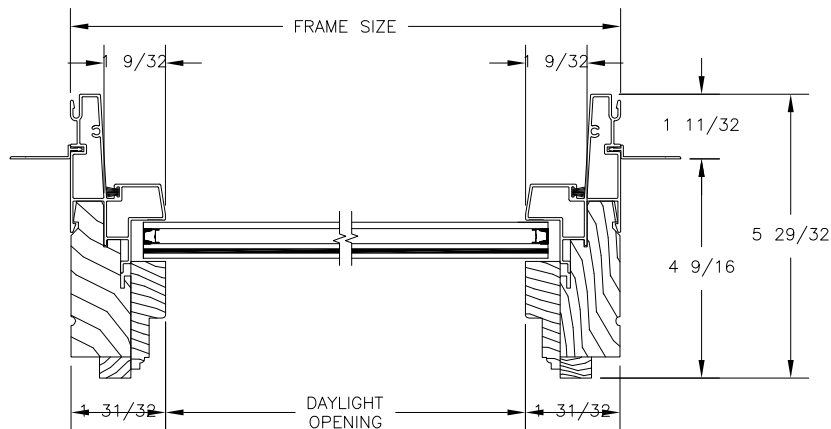


JAMBS

Pinnacle Impact Series


CLAD DIRECT SET

SECTION DETAILS : MULLIONS


SCALE: 3" = 1'-0"

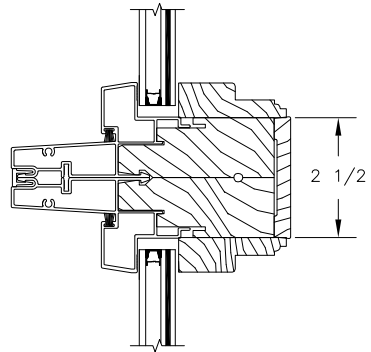

HORIZONTAL MULLION
DIRECT SET/DIRECT SET



VERTICAL MULLION
DIRECT SET/DIRECT SET

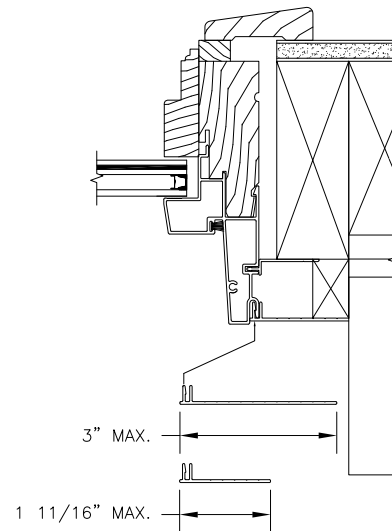


OPTIONAL FRAME
EXPANDERS

Pinnacle Impact Series


CLAD DIRECT SET

SECTION DETAILS : CASING OPTIONS


SCALE: 3" = 1'-0"

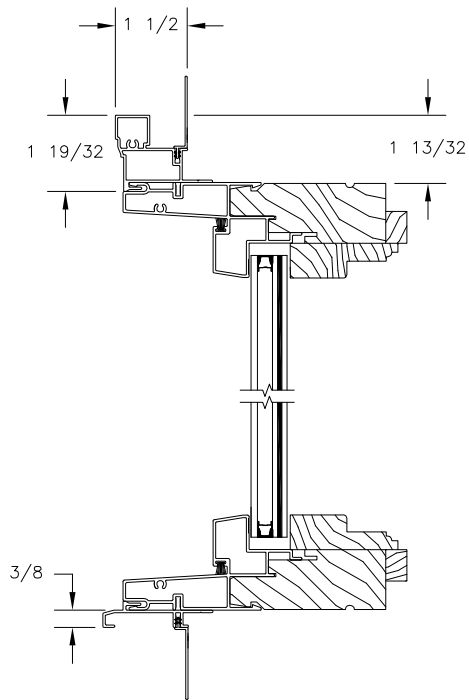

HEAD JAMB & SILL WITH
CLAD BRICKMOULD CASING

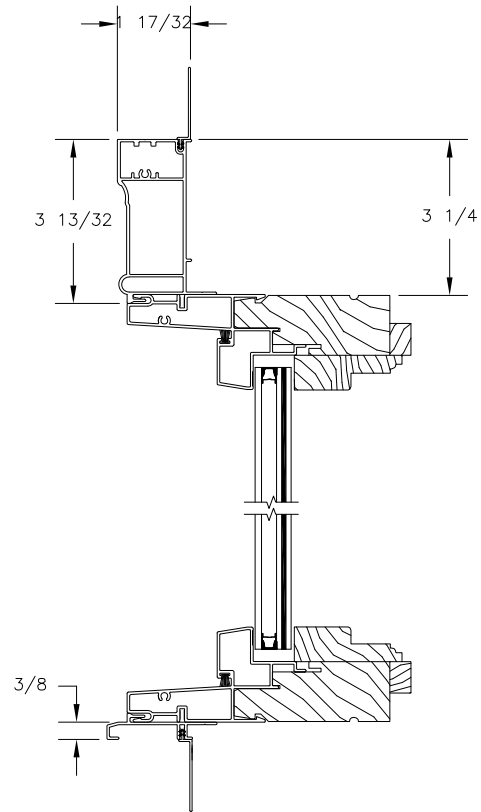

HEAD JAMB & SILL WITH
CLAD WILLIAMSBURG CASING


















CLAD BRICKMOULD CASING
WITH OPTIONAL J-CHANNEL COVER

Pinnacle Impact Series

CLAD DIRECT SET

SECTION DETAILS : DIVIDED LITE OPTIONS

SCALE: 3" = 1'-0"

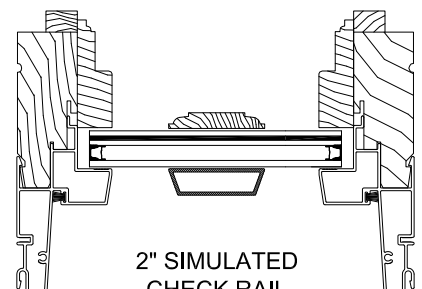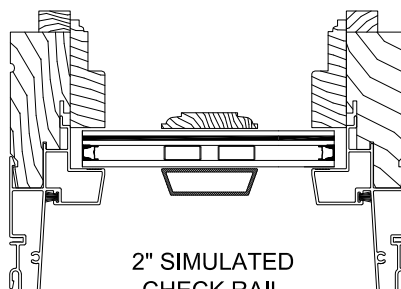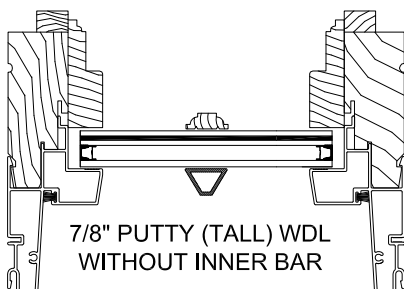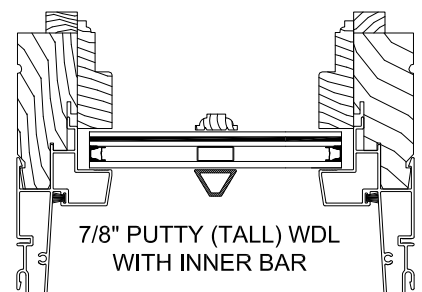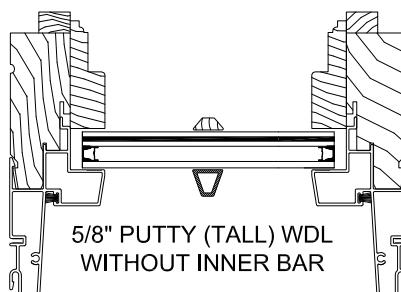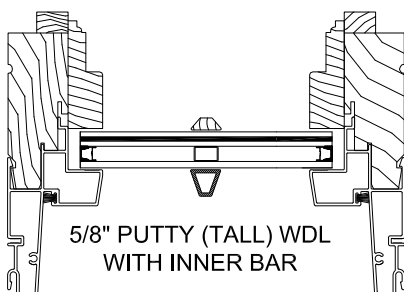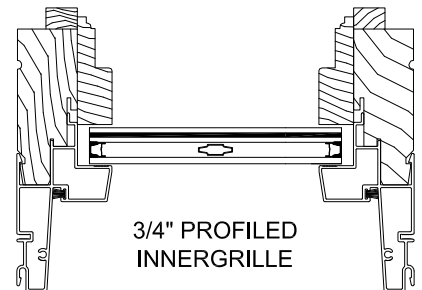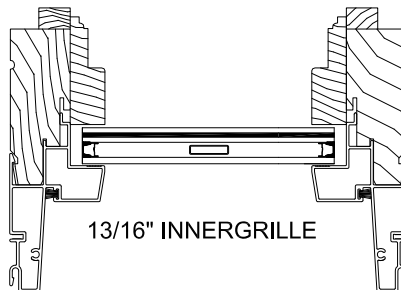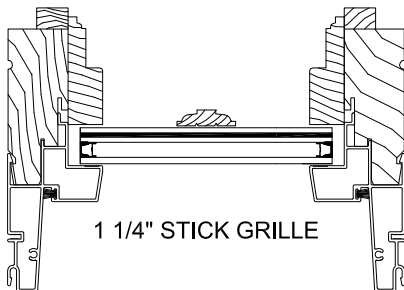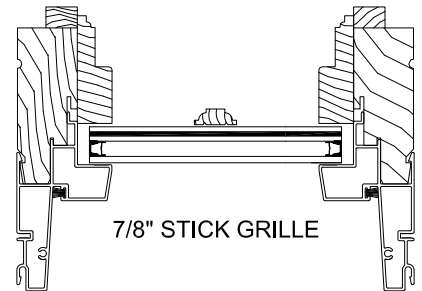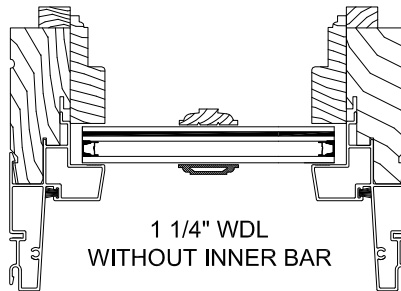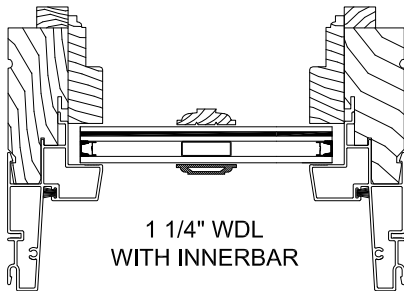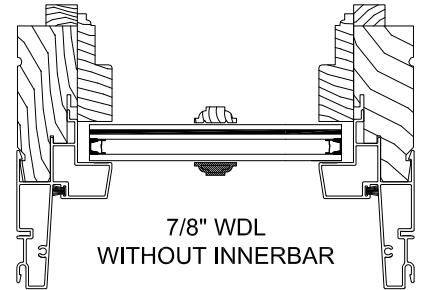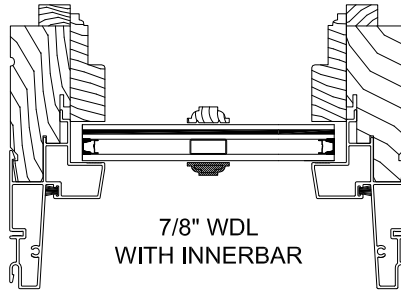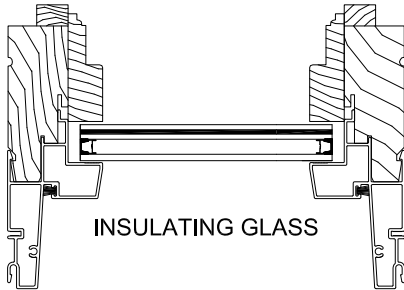

Pinnacle Impact Series

CLAD DIRECT SET

SECTION DETAILS : DIVIDED LITE OPTIONS

SCALE: 3" = 1'-0"

