

Pinnacle Series


PATIO DOOR - FRENCH SLIDER

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opp. Primed Mas. Opp. Clad Rough Opp. Frame Glass	2-10 3/4 2-8 3/4 2-8 3/4 2-8 21 1/4	5-1 3/4 4-11 3/4 4-11 3/4 4-11 21 1/4	7-9 3/4 7-7 3/4 7-7 3/4 7-7 21 1/4	9-10 9/16 9-8 9/16 9-8 9/16 9-7 13/16 21 1/4
6-9 6-8 6-8 6-7 1/2 64					
	2668-S	5068-OX	7668-OX/S	10068-OXXO	
7-0 6-11 6-11 6-10 1/2 67					
	26610-S	50610-OX	76610-OX/S	100610-OXXO	
8-1 8-0 8-0 7-11 1/2 80					
	2680-S	5080-OX	7680-OX/S	10080-OXXO	
9-0 9-0 8-11 1/2 92					
	2690-S (CLAD ONLY)	5090-OX (CLAD ONLY)			
10-0 10-0 9-11 1/2 104					
	26100-S (CLAD ONLY)	50100-OX (CLAD ONLY)			

OTHER GRILLE PATTERNS

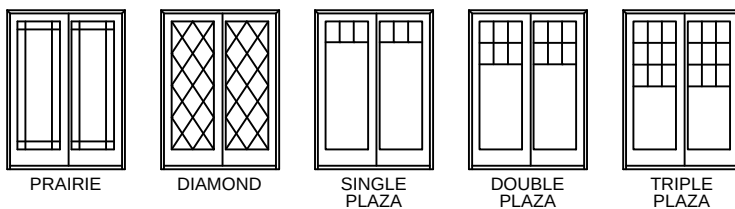

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

FOR PRIMED WM-180

- ADD 2" TO FRAME WIDTH
- ADD 1" TO FRAME HEIGHT

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 1/32" TO FRAME WIDTH
- ADD 2 1/2" TO FRAME HEIGHT

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 1/32" TO FRAME WIDTH
- ADD 3 1/2" TO FRAME HEIGHT

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 1/32" TO FRAME WIDTH
- ADD 4 1/2" TO FRAME HEIGHT

FOR PRIMED WILLIAMSBURG

- ADD 5 17/32" TO FRAME WIDTH
- ADD 2 1/4" TO FRAME HEIGHT

FOR PRIMED PLANTATION

- ADD 5 1/32" TO FRAME WIDTH
- ADD 5 1/2" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

Pinnacle Series

PATIO DOOR - FRENCH SLIDER

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Primed
Mas. Opg. Clad
Rough Opg.
Frame
Glass


3-4 3/4
3-2 3/4
3-2 3/4
3-2
27 1/4

6-1 3/4
5-11 3/4
5-11 3/4
5-11
27 1/4


9-3 3/4
9-1 3/4
9-1 3/4
9-1
27 1/4

11-10 9/16
11-8 9/16
11-8 9/16
11-7 13/16
27 1/4


6-9
6-8
6-8
6-7 1/2
64




3068-S



6068-OX




9068-OX/S




12068-OXXO


7-0
6-11
6-11
6-10 1/2
67




30610-S



60610-OX




90610-OX/S




120610-OXXO


8-1
8-0
8-0
7-11 1/2
80




3080-S



6080-OX




9080-OX/S




12080-OXXO

9-0
9-0
8-11 1/2
92



3090-S


(CLAD ONLY)



6090-OX


(CLAD ONLY)

10-0
10-0
9-11 1/2
104



30100-S


(CLAD ONLY)




60100-OX

(CLAD ONLY)


OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE
PLAZA



DOUBLE
PLAZA



TRIPLE
PLAZA

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

FOR PRIMED WM-180

- ▣ ADD 2" TO FRAME WIDTH
- ▣ ADD 1" TO FRAME HEIGHT

FOR PRIMED 3 1/2" FLAT CASING

- ▣ ADD 5 1/32" TO FRAME WIDTH
- ▣ ADD 2 1/2" TO FRAME HEIGHT

FOR PRIMED 4 1/2" BACKBAND

- ▣ ADD 7 1/32" TO FRAME WIDTH
- ▣ ADD 3 1/2" TO FRAME HEIGHT

FOR PRIMED 5 1/2" FLAT CASING

- ▣ ADD 9 1/32" TO FRAME WIDTH
- ▣ ADD 4 1/2" TO FRAME HEIGHT

FOR PRIMED WILLIAMSBURG

- ▣ ADD 5 17/32" TO FRAME WIDTH
- ▣ ADD 2 1/4" TO FRAME HEIGHT

FOR PRIMED PLANTATION

- ▣ ADD 5 1/32" TO FRAME WIDTH
- ▣ ADD 5 1/2" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

Pinnacle Series

PATIO DOOR - FRENCH SLIDER

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Primed
Mas. Opg. Clad
Rough Opg.
Frame
Glass

4-4 3/4

4-2 3/4

4-2 3/4

4-2

39 1/4

8-1 3/4

7-11 3/4

7-11 3/4

7-11

39 1/4

12-3 3/4

12-1 3/4

12-1 3/4

12-1

39 1/4

15-10 9/16


15-8 9/16

15-8 9/16


15-7 13/16

39 1/4


6-9
6-8
6-8
6-7 1/2
64




4068-S



8068-OX




12068-OX/S

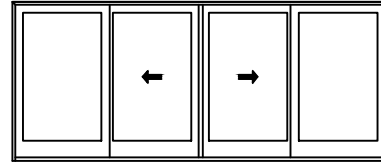


16068-OXXO


7-0
6-11
6-11
6-10 1/2
67




40610-S



80610-OX




120610-OX/S

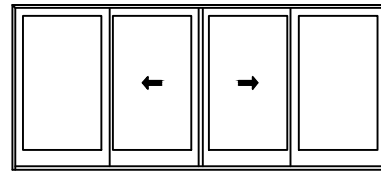


160610-OXXO


8-1
8-0
8-0
7-11 1/2
80




4080-S



8080-OX




12080-OX/S

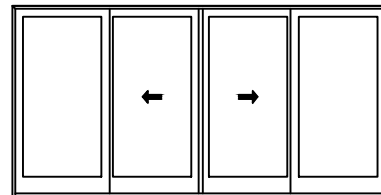


16080-OXXO


OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE
PLAZA



DOUBLE
PLAZA



TRIPLE
PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

FOR PRIMED WM-180

- ▣ ADD 2" TO FRAME WIDTH
- ▣ ADD 1" TO FRAME HEIGHT

FOR PRIMED 3 1/2" FLAT CASING

- ▣ ADD 5 1/32" TO FRAME WIDTH
- ▣ ADD 2 1/2" TO FRAME HEIGHT

FOR PRIMED 4 1/2" BACKBAND

- ▣ ADD 7 1/32" TO FRAME WIDTH
- ▣ ADD 3 1/2" TO FRAME HEIGHT

FOR PRIMED 5 1/2" FLAT CASING

- ▣ ADD 9 1/32" TO FRAME WIDTH
- ▣ ADD 4 1/2" TO FRAME HEIGHT

FOR PRIMED WILLIAMSBURG

- ▣ ADD 5 17/32" TO FRAME WIDTH
- ▣ ADD 2 1/4" TO FRAME HEIGHT

FOR PRIMED PLANTATION

- ▣ ADD 5 1/32" TO FRAME WIDTH
- ▣ ADD 5 1/2" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:





CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD

Pinnacle Series

PATIO DOOR - DIRECT SET TRANSOMS

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Primed Mas. Opg. Clad Rough Opg. Frame Glass	2-10 3/4 2-8 3/4 2-8 3/4 2-8 29	5-1 3/4 4-11 3/4 4-11 3/4 4-11 56	5-1 3/4 4-11 3/4 4-11 3/4 2-5 1/2 2-5 1/2 26 1/2 26 1/2
1-2 1/2 1-1 1/2 1-1 1/2 1-1 10	 2611	 5011	 5011-2
1-5 1/2 1-4 1/2 1-4 1/2 1-4 13	 2614	 5014	 5014-2
2-1 1/2 2-0 1/2 2-0 1/2 2-0 21	 2620	 5020	 5020-2
Mas. Opg. Primed Mas. Opg. Clad Rough Opg. Frame Glass	3-4 3/4 3-2 3/4 3-2 3/4 3-2 35	6-1 3/4 5-11 3/4 5-11 3/4 5-11 68	6-1 3/4 5-11 3/4 5-11 3/4 2-11 1/2 2-11 1/2 32 1/2 32 1/2
1-2 1/2 1-1 1/2 1-1 1/2 1-1 10	 3011	 6011	 6011-2
1-5 1/2 1-4 1/2 1-4 1/2 1-4 13	 3014	 6014	 6014-2
2-1 1/2 2-0 1/2 2-0 1/2 2-0 21	 3020	 6020	 6020-2
Mas. Opg. Primed Mas. Opg. Clad Rough Opg. Frame Glass	4-4 3/4 4-2 3/4 4-2 3/4 4-2 47	8-1 3/4 7-11 3/4 7-11 3/4 7-11 92	8-1 3/4 7-11 3/4 7-11 3/4 3-11 1/2 3-11 1/2 44 1/2 44 1/2
1-2 1/2 1-1 1/2 1-1 1/2 1-1 10	 4011	 8011	 8011-2
1-5 1/2 1-4 1/2 1-4 1/2 1-4 13	 4014	 8014	 8014-2
2-1 1/2 2-0 1/2 2-0 1/2 2-0 21	 4020	 8020	 8020-2

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

FOR PRIMED WM-180

- ADD 2" TO FRAME WIDTH
- ADD 1" TO FRAME HEIGHT

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 1/32" TO FRAME WIDTH
- ADD 2 1/2" TO FRAME HEIGHT

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 1/32" TO FRAME WIDTH
- ADD 3 1/2" TO FRAME HEIGHT

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 1/32" TO FRAME WIDTH
- ADD 4 1/2" TO FRAME HEIGHT

FOR PRIMED WILLIAMSBURG

- ADD 5 17/32" TO FRAME WIDTH
- ADD 2 1/4" TO FRAME HEIGHT

FOR PRIMED PLANTATION

- ADD 5 1/32" TO FRAME WIDTH
- ADD 5 1/2" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD
MULLS ABOVE STATIONARY UNITS ONLY