

ELEVATIONS
SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0"

[illegible]

PRAIRIE

PLAZA

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.

Pinnacle Series


DOUBLE HUNG - 16" WIDE

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opp. Primed	Mas. Opp. Clad	Rough Opp.	Frame	Glass					
						2-0 3/4	3-10 1/8	5-7 1/2		
						1-10 1/8	3-7 1/2	5-4 7/8		
						1-10 1/8	3-7 1/2	5-4 7/8		
						1-9 3/8	3-6 3/4	5-4 1/8		
						16	16	16		
7-2 13/16	7-1 1/4	7-1 1/4	7-0 3/4	38-38		1638*				
7-6 13/16	7-5 1/4	7-5 1/4	7-4 3/4	40-40		1640*				
7-10 13/16	7-9 1/4	7-9 1/4	7-8 3/4	42-42		1642*				
8-2 13/16	8-1 1/4	8-1 1/4	8-0 3/4	44-44		1644*				

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

(* CONCEALED JAMBLINER ONLY)

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.

ELEVATIONS
SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0"

	Mas. Opg. Primed	Mas. Opg. Clad	Rough Opg. Frame	Glass				
3-2 13/16	3-1 1/4	3-1 1/4	3-1 1/4	3-0 3/4	14-14	2014	2014-2	2014-3
3-6 13/16	3-5 1/4	3-5 1/4	3-5 1/4	3-4 3/4	16-16	2016	2016-2	2016-3
4-2 13/16	4-1 1/4	4-1 1/4	4-1 1/4	4-0 3/4	20-20	2020	2020-2	2020-3
4-6 13/16	4-5 1/4	4-5 1/4	4-5 1/4	4-4 3/4	22-22	2022	2022-2	2022-3
4-10 13/16	4-9 1/4	4-9 1/4	4-9 1/4	4-8 3/4	24-24	2024	2024-2	2024-3
5-2 13/16	5-1 1/4	5-1 1/4	5-1 1/4	5-0 3/4	26-26	2026	2026-2	2026-3
5-6 13/16	5-5 1/4	5-5 1/4	5-5 1/4	5-4 3/4	28-28	2028	2028-2	2028-3
5-10 13/16	5-9 1/4	5-9 1/4	5-9 1/4	5-8 3/4	30-30	2030	2030-2	2030-3
6-2 13/16	6-1 1/4	6-1 1/4	6-1 1/4	6-0 3/4	32-32	2032	2032-2	2032-3
6-6 13/16	6-5 1/4	6-5 1/4	6-4 3/4	34-34		2034	2034-2	2034-3
6-10 13/16	6-9 1/4	6-9 1/4	6-8 3/4	36-36		2036	2036-2	2036-3
6/14								

PRAIRIE

PLAZA

FOR CLAD BRICKMOULD

- ❑ ADD 2 13/16" TO FRAME WIDTH
- ❑ ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ❑ ADD 6 1/2" TO FRAME WIDTH
- ❑ ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ❑ ADD 2 19/32" TO FRAME WIDTH
- ❑ ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ❑ ADD 5 5/8" TO FRAME WIDTH
- ❑ ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ❑ ADD 7 5/8" TO FRAME WIDTH
- ❑ ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ❑ ADD 9 5/8" TO FRAME WIDTH
- ❑ ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ❑ ADD 5 1/8" TO FRAME WIDTH
- ❑ ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ❑ ADD 5 5/8" TO FRAME WIDTH
- ❑ ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.

Pinnacle Series

DOUBLE HUNG - 20" WIDE

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opp. Primed	2-4 3/4	4-6 1/8	6-7 1/2
	Mas. Opp. Clad	2-2 1/8	4-3 1/2	6-4 7/8
	Rough Opp.	2-2 1/8	4-3 1/2	6-4 7/8
	Frame	2-1 3/8	4-2 3/4	6-4 1/8
	Glass	20	20	20
7-2 13/16				
7-1 1/4		2038*	2038-2*	2038-3*
7-1 1/4				
7-0 3/4				
38-38				
7-6 13/16				
7-5 1/4		2040*	2040-2*	2040-3*
7-5 1/4				
7-4 3/4				
40-40				
NA				
7-9 1/4		2042*	2042-2*	2042-3*
7-9 1/4				
7-8 3/4				
42-42				
NA				
8-1 1/4		2044*	2044-2*	2044-3*
8-1 1/4				
8-0 3/4				
44-44				

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

(* CONCEALED JAMBLINER ONLY)

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.

Pinnacle Series


DOUBLE HUNG - 24" WIDE

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Primed	Mas. Opg. Clad	Rough Opg.	Frame	Glass	24	24	24
2-8 3/4	5-2 1/8	7-7 1/2					
2-6 1/8	4-11 1/2	7-4 7/8					
2-6 1/8	4-11 1/2	7-4 7/8					
2-5 3/8	4-10 3/4	7-4 1/8					
24	24	24					
3-2 13/16	3-1 1/4	3-1 1/4	3-0 3/4	14-14			
2414							
3-6 13/16	3-5 1/4	3-5 1/4	3-4 3/4	16-16			
2416							
4-2 13/16	4-1 1/4	4-1 1/4	4-0 3/4	20-20			
2420							
4-6 13/16	4-5 1/4	4-5 1/4	4-4 3/4	22-22			
2422							
4-10 13/16	4-9 1/4	4-9 1/4	4-8 3/4	24-24			
2424							
5-2 13/16	5-1 1/4	5-1 1/4	5-0 3/4	26-26			
2426							
5-6 13/16	5-5 1/4	5-5 1/4	5-4 3/4	28-28			
2428							
5-10 13/16	5-9 1/4	5-9 1/4	5-8 3/4	30-30			
2430							
6-2 13/16	6-1 1/4	6-1 1/4	6-0 3/4	32-32			
2432							
6-6 13/16	6-5 1/4	6-5 1/4	6-4 3/4	34-34			
2434							
6-10 13/16	6-9 1/4	6-9 1/4	6-8 3/4	36-36			
2436							

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

DOUBLE HUNG - 24" WIDE

ELEVATIONS

SCALE: 1/8" = 1'-0"


Mas. Opp. Primed
Mas. Opp. Clad
Rough Opp.
Frame
Glass

2-8 3/4
2-6 1/8
2-6 1/8
2-5 3/8
24

5-2 1/8
4-11 1/2
4-11 1/2
4-10 3/4
24

7-7 1/2
7-4 7/8
7-4 7/8
7-4 1/8
24

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

(* CONCEALED JAMBLINER ONLY)

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION


- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL


NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING


7-2 13/16
7-1 1/4
7-1 1/4
7-0 3/4
38-38



2438*



2438-2*




2438-3*


7-6 13/16
7-5 1/4
7-5 1/4
7-4 3/4
40-40



2440*



2440-2*




2440-3*


NA
7-9 1/4
7-9 1/4
7-8 3/4
42-42



2442*



2442-2*




2442-3*


NA
8-1 1/4
8-1 1/4
8-0 3/4
44-44



2444*



2444-2*



2444-3*

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series


DOUBLE HUNG - 26" WIDE

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opg. Primed	Mas. Opg. Clad	Rough Opg.	Frame Class				
					2-10 3/4	5-6 1/8	8-1 1/2	
					2-8 1/8	5-3 1/2	7-10 7/8	
					2-8 1/8	5-3 1/2	7-10 7/8	
					2-7 3/8	5-2 3/4	7-10 1/8	
					26	26	26	
3-2 13/16	3-1 1/4	3-1 1/4	3-0 3/4	14-14				
					2614	2614-2	2614-3	
3-6 13/16	3-5 1/4	3-5 1/4	3-4 3/4	16-16				
					2616	2616-2	2616-3	
4-2 13/16	4-1 1/4	4-1 1/4	4-0 3/4	20-20				
					2620	2620-2	2620-3	
4-6 13/16	4-5 1/4	4-5 1/4	4-4 3/4	22-22				
					2622	2622-2	2622-3	
4-10 13/16	4-9 1/4	4-9 1/4	4-8 3/4	24-24				
					2624	2624-2	2624-3	
5-2 13/16	5-1 1/4	5-1 1/4	5-0 3/4	26-26				
					2626	2626-2	2626-3	
5-6 13/16	5-5 1/4	5-5 1/4	5-4 3/4	28-28				
					2628	2628-2	2628-3	
5-10 13/16	5-9 1/4	5-9 1/4	5-8 3/4	30-30				
					2630	2630-2	2630-3	
6-2 13/16	6-1 1/4	6-1 1/4	6-0 3/4	32-32				
					2632	2632-2	2632-3	
6-6 13/16	6-5 1/4	6-5 1/4	6-4 3/4	34-34				
					2634	2634-2	2634-3	
6-10 13/16	6-9 1/4	6-9 1/4	6-8 3/4	36-36				
					2636	2636-2	2636-3	

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

DOUBLE HUNG - 26" WIDE

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opg. Primed Mas. Opg. Clad Rough Opg. Frame Glass	2-10 3/4 2-8 1/8 2-8 1/8 2-7 3/8 26	5-6 1/8 5-3 1/2 5-3 1/2 5-2 3/4 26	8-1 1/2 7-10 7/8 7-10 7/8 7-10 1/8 26
7-2 13/16 7-1 1/4 7-1 1/4 7-0 3/4 38-38				
	2638*	2638-2*	2638-3*	
7-6 13/16 7-5 1/4 7-5 1/4 7-4 3/4 40-40				
	2640*	2640-2*	2640-3*	
NA 7-9 1/4 7-9 1/4 7-8 3/4 42-42				
	2642*	2642-2*	2642-3*	
NA 8-1 3/4 8-1 1/4 8-0 3/4 44-44				
	2644*	2644-2*	2644-3*	

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

(* CONCEALED JAMBLINER ONLY)

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

ELEVATIONS
SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0"

	Mas. Opg. Primed	Mas. Opg. Clad	Rough Opg.	Frame	Glass			
3-2 13/16	3-1 1/4	3-1 1/4	3-1 1/4	3-0 3/4	14-14	28	28	28
3-6 13/16	3-5 1/4	3-5 1/4	3-5 1/4	3-4 3/4	16-16	2814	2814-2	2814-3
4-2 13/16	4-1 1/4	4-1 1/4	4-1 1/4	4-0 3/4	20-20	2816	2816-2	2816-3
4-6 13/16	4-5 1/4	4-5 1/4	4-4 3/4	22-22		2820	2820-2	2820-3
4-10 13/16	4-9 1/4	4-9 1/4	4-8 3/4	24-24		2822	2822-2	2822-3
5-2 13/16	5-1 1/4	5-1 1/4	5-0 3/4	26-26		2824	2824-2	2824-3
5-6 13/16	5-5 1/4	5-5 1/4	5-4 3/4	28-28		2826	2826-2	2826-3
5-10 13/16	5-9 1/4	5-9 1/4	5-8 3/4	30-30		2828	2828-2	2828-3
6-2 13/16	6-1 1/4	6-1 1/4	6-0 3/4	32-32		2830	2830-2	2830-3
6-6 13/16	6-5 1/4	6-5 1/4	6-4 3/4	34-34		2832	2832-2	2832-3
6-10 13/16	6-9 1/4	6-9 1/4	6-8 3/4	36-36		2834	2834-2	2834-3
6/14						2836	2836-2	2836-3

PRAIRIE PLAZA

FOR CLAD BRICKMOUND

- ❑ ADD 2 13/16" TO FRAME WIDTH
- ❑ ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ❑ ADD 6 1/2" TO FRAME WIDTH
- ❑ ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ❑ ADD 2 19/32" TO FRAME WIDTH
- ❑ ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ❑ ADD 5 5/8" TO FRAME WIDTH
- ❑ ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ❑ ADD 7 5/8" TO FRAME WIDTH
- ❑ ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ❑ ADD 9 5/8" TO FRAME WIDTH
- ❑ ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ❑ ADD 5 1/8" TO FRAME WIDTH
- ❑ ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ❑ ADD 5 5/8" TO FRAME WIDTH
- ❑ ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL










NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

DOUBLE HUNG - 28" WIDE

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opp. Primed Mas. Opp. Clad Rough Opp. Frame Glass	3-0 3/4 2-10 1/8 2-10 1/8 2-9 3/8 28	5-10 1/8 5-7 1/2 5-7 1/2 5-6 3/4 28	8-7 1/2 8-4 7/8 8-4 7/8 8-4 1/8 28
7-2 13/16 7-1 1/4 7-1 1/4 7-0 3/4 38-38				
		2838*	2838-2*	2838-3*
NA 7-9 1/4 7-9 1/4 7-8 3/4 42-42				
		2842*	2842-2*	2842-3*
NA 8-1 1/4 8-1 1/4 8-0 3/4 44-44				
		2844*	2844-2*	2844-3*

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

(* CONCEALED JAMBLINER ONLY)

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

SCALE: 1/8" = 1'-0"

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

DOUBLE HUNG - 30" WIDE

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opg. Primed Mas. Opg. Clad Rough Opg. Frame Glass	3-2 3/4 3-0 1/8 3-0 1/8 2-11 3/8 30	6-2 1/8 5-11 1/2 5-11 1/2 5-10 3/4 30	8-11 1/2 8-10 7/8 8-10 7/8 8-10 1/8 30
7-2 13/16 7-1 1/4 7-1 1/4 7-0 3/4 38-38				
	3038*	3038-2*	3038-3*	
7-6 13/16 7-5 1/4 7-5 1/4 7-4 3/4 40-40				
	3040*	3040-2*	3040-3*	
NA 7-9 1/4 7-9 1/4 7-8 3/4 42-42				
	3042*	3042-2*	3042-3*	
NA 8-1 1/4 8-1 1/4 8-0 3/4 44-44				
	3044*	3044-2*	3044-3*	

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

(* CONCEALED JAMBLINER ONLY)

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:











CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

DOUBLE HUNG - 32" WIDE

ELEVATIONS


SCALE: 1/8" = 1'-0"

Mas. Opp. Primed Mas. Opp. Clad Rough Opp. Frame Glass	3-4 3/4	6-6 1/8	9-7 1/2
3-2 13/16	3-2 1/8	6-3 1/2	9-4 7/8
3-1 1/4	3-2 1/8	6-3 1/2	9-4 7/8
3-1 1/4	3-1 3/8	6-2 3/4	9-4 1/8
3-0 3/4	32	32	32
14-14			
3-6 13/16	3214	3214-2	3214-3
3-5 1/4			
3-5 1/4	3216	3216-2	3216-3
4-2 13/16			
4-1 1/4	3220	3220-2	3220-3
4-1 1/4			
4-0 3/4	3222	3222-2	3222-3
20-20			
22-22	3224	3224-2	3224-3
4-10 13/16			
4-9 1/4	3226	3226-2	3226-3
4-9 1/4			
4-8 3/4	3228	3228-2	3228-3
24-24			
26-26	3230	3230-2	3230-3
5-2 13/16			
5-1 1/4	3232	3232-2	3232-3
5-1 1/4			
5-0 3/4	3234	3234-2	3234-3
28-28			
30-30	3236	3236-2	3236-3
6-2 13/16			
6-1 1/4	3238	3238-2	3238-3
6-1 1/4			
6-0 3/4	3240	3240-2	3240-3
32-32			
34-34	3242	3242-2	3242-3
6-6 13/16			
6-5 1/4	3244	3244-2	3244-3
6-5 1/4			
6-4 3/4	3246	3246-2	3246-3
36-36			
6-10 13/16	3248	3248-2	3248-3

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series


DOUBLE HUNG - 32" WIDE

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opp. Primed	Mas. Opp. Clad	Rough Opp.	Frame	Glass				
						3-4 3/4	6-6 1/8	9-7 1/2	
						3-2 1/8	6-3 1/2	9-4 7/8	
						3-2 1/8	6-3 1/2	9-4 7/8	
						3-1 3/8	6-2 3/4	9-4 1/8	
						32	32	32	
7-2 13/16									
7-1 1/4									
7-1 1/4									
7-0 3/4									
38-38						3238*	3238-2*	3238-3*	(* CONCEALED JAMBLINER ONLY)
7-6 13/16									
7-5 1/4									
7-5 1/4									
7-4 3/4									
40-40						3240*	3240-2*	3240-3*	
NA									
7-9 1/4									
7-9 1/4									
7-8 3/4									
42-42						3242*	3242-2*	3242-3*	
NA									
8-1 1/4									
8-1 1/4									
8-0 3/4									
44-44						3244*	3244-2*	3244-3*	

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTES:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

DOUBLE HUNG - 36" WIDE

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opp. Primed Mas. Opp. Clad Rough Opp. Frame Glass	3-8 3/4 3-6 1/8 3-6 1/8 3-5 3/8 36 36 36	7-2 1/8 6-11 1/2 6-11 1/2 6-10 3/4 36	10-7 1/2 10-4 7/8 10-4 7/8 10-4 1/8 36
3-2 13/16	3-1 1/4 3-1 1/4 3-0 3/4 14-14			
3-6 13/16	3-5 1/4 3-5 1/4 3-4 3/4 16-16			
4-2 13/16	4-1 1/4 4-1 1/4 4-0 3/4 20-20			
4-6 13/16	4-5 1/4 4-5 1/4 4-4 3/4 22-22			
4-10 13/16	4-9 1/4 4-9 1/4 4-8 3/4 24-24			
5-2 13/16	5-1 1/4 5-1 1/4 5-0 3/4 26-26			
5-6 13/16	5-5 1/4 5-5 1/4 5-4 3/4 28-28			
5-10 13/16	5-9 1/4 5-9 1/4 5-8 3/4 30-30			
6-2 13/16	6-1 1/4 6-1 1/4 6-0 3/4 32-32			
6-6 13/16	6-5 1/4 6-5 1/4 6-4 3/4 34-34			
6-10 13/16	6-9 1/4 6-9 1/4 6-8 3/4 36-36			
6/14		3636	3636-2	3636-3

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

DOUBLE HUNG - 36" WIDE

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opp. Primed Mas. Opp. Clad Rough Opp. Frame Glass	3-8 3/4 3-6 1/8 3-6 1/8 3-5 3/8 36	7-2 1/8 6-11 1/2 6-11 1/2 6-10 3/4 36	10-7 1/2 10-4 7/8 10-4 7/8 10-4 1/8 36
7-2 13/16 7-1 1/4 7-1 1/4 7-0 3/4 38-38				
	3638*	3638-2*	3638-3*	
7-6 13/16 7-5 1/4 7-5 1/4 7-4 3/4 40-40				
	3640*	3640-2*	3640-3*	
NA 7-9 1/4 7-9 1/4 7-8 3/4 42-42				
	3642*	3642-2*	3642-3*	
NA 8-1 1/4 8-1 1/4 8-0 3/4 44-44				
	3644*	3644-2*	3644-3*	

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

(* CONCEALED JAMBLINER ONLY)

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series


DOUBLE HUNG - 40" WIDE

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opp. Primed	Mas. Opp. Clad	Rough Opp.	Frame	Glass	40	40	40
3-2 13/16	3-1 1/4	3-1 1/4	3-0 3/4	14-14				
						4014	4014-2	4014-3
3-6 13/16	3-5 1/4	3-5 1/4	3-4 3/4	16-16				
						4016	4016-2	4016-3
4-2 13/16	4-1 1/4	4-1 1/4	4-0 3/4	20-20				
						4020	4020-2	4020-3
4-6 13/16	4-5 1/4	4-5 1/4	4-4 3/4	22-22				
						4022	4022-2	4022-3
4-10 13/16	4-9 1/4	4-9 1/4	4-8 3/4	24-24				
						4024	4024-2	4024-3
5-2 13/16	5-1 1/4	5-1 1/4	5-0 3/4	26-26				
						4026	4026-2	4026-3
5-6 13/16	5-5 1/4	5-5 1/4	5-4 3/4	28-28				
						4028	4028-2	4028-3
5-10 13/16	5-9 1/4	5-9 1/4	5-8 3/4	30-30				
						4030	4030-2	4030-3
6-2 13/16	6-1 1/4	6-1 1/4	6-0 3/4	32-32				
						4032	4032-2	4032-3
6-6 13/16	6-5 1/4	6-5 1/4	6-4 3/4	34-34				
						4034	4034-2	4034-3
6-10 13/16	6-9 1/4	6-9 1/4	6-8 3/4	36-36				
						4036	4036-2	4036-3

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

SCALE: 1/8" = 1'-0"

A blank 4x8 grid for writing numbers.

ELEVATIONS: (CLAD CONCEALED JAMBLINER ONLY)
SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0"

6/14

PRAIRIE

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

ELEVATIONS: (CLAD CONCEALED JAMBLINER ONLY)
SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0"




NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series













DOUBLE HUNG - ORIEL

ELEVATIONS

SCALE: 1/8" = 1'-0"



OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING


NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.

Pinnacle Series





DOUBLE HUNG - ORIEL

ELEVATIONS

SCALE: 1/8" = 1'-0"

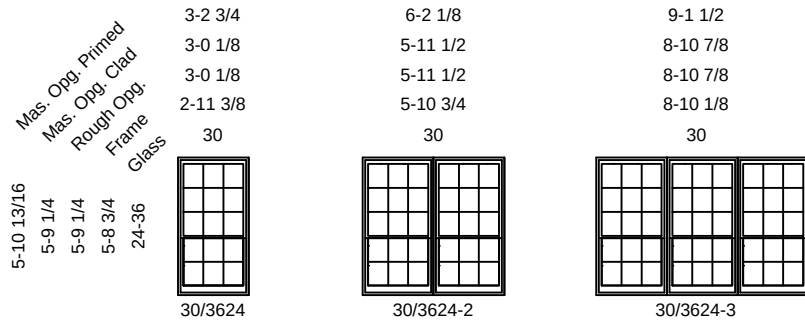

OTHER GRILLE PATTERNS

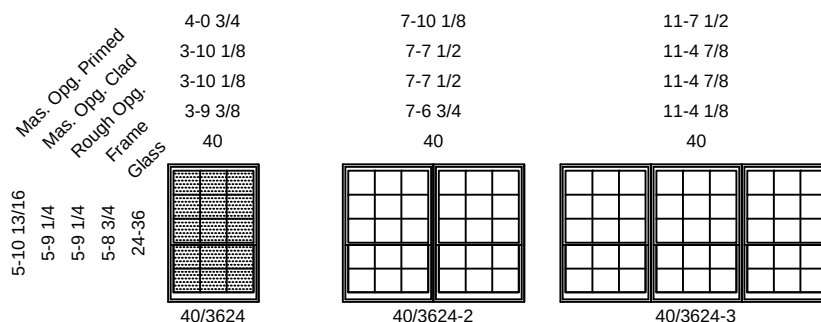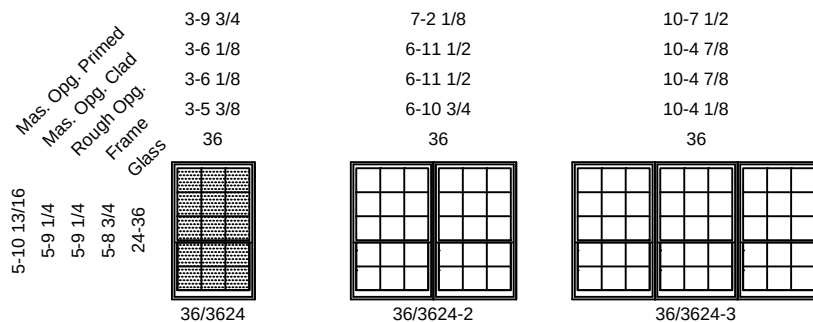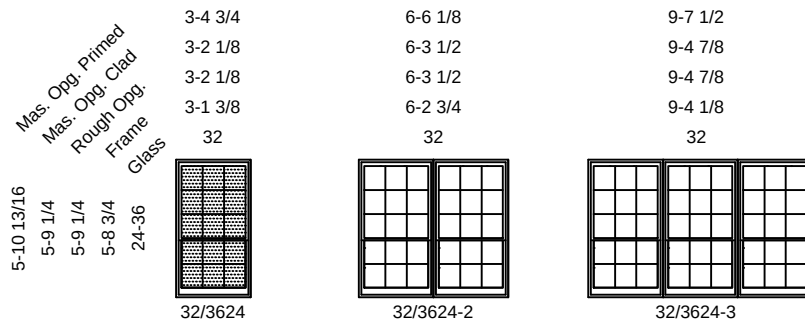

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTES:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:




CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series













DOUBLE HUNG - COTTAGE

ELEVATIONS

SCALE: 1/8" = 1'-0"



OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING


NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.

Pinnacle Series



DOUBLE HUNG - COTTAGE

ELEVATIONS

SCALE: 1/8" = 1'-0"

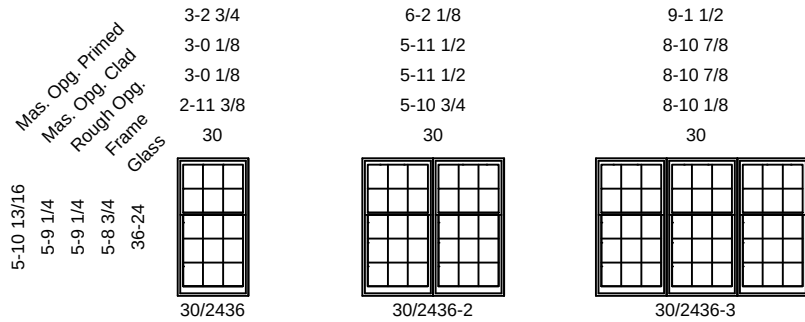

OTHER GRILLE PATTERNS

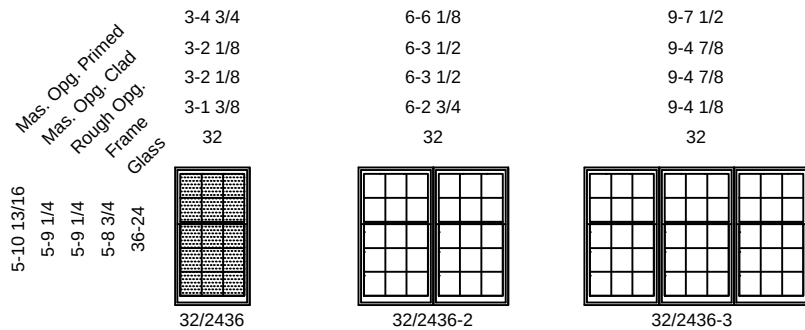

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*


FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

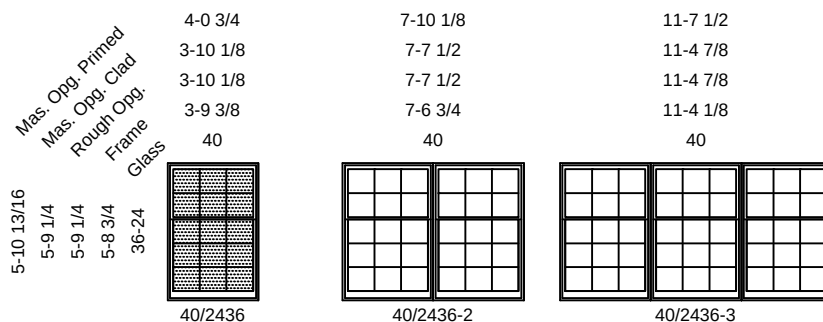

NOTES:




























CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

DOUBLE HUNG - PICTURE

ELEVATIONS

SCALE: 1/8" = 1'-0"

	1-4 3/4	1-6 3/4	1-8 3/4	2-4 3/4	2-8 3/4	2-10 3/4	3-0 3/4	3-4 3/4	4-4 3/4	5-4 3/4	6-4 3/4
Mas. Opg. Primed	1-2 1/8	1-4 1/8	1-6 1/8	2-2 1/8	2-6 1/8	2-8 1/8	2-10 1/8	3-2 1/8	4-2 1/8	5-2 1/8	6-2 1/8
Mas. Opg. Clad	1-2 1/8	1-4 1/8	1-6 1/8	2-2 1/8	2-6 1/8	2-8 1/8	2-10 1/8	3-2 1/8	4-2 1/8	5-2 1/8	6-2 1/8
Rough Opg.	1-1 3/8	1-3 3/8	1-5 3/8	2-1 3/8	2-5 3/8	2-7 3/8	2-9 3/8	3-1 3/8	4-1 3/8	5-1 3/8	6-1 3/8
Frame	8	10	12	20	24	26	28	32	44	56	68
Glass											
4-2 13/16											
4-1 1/4	0842	1042	1242	2042	2442	2642	2842	3242	4442	5642	6842
4-1 1/4											
4-1 1/4	0846	1046	1246	2046	2446	2646	2846	3246	4446	5646	6846
4-1 1/4											
4-1 1/4	0850	1050	1250	2050	2450	2650	2850	3250	4450	5650	6850
4-1 1/4											
4-1 1/4	0854	1054	1254	2054	2454	2654	2854	3254	4454	5654	6854
4-1 1/4											
4-1 1/4	0858	1058	1258	2058	2458	2658	2858	3258	4458	5658	6858
4-1 1/4											
4-1 1/4	0862	1062	1262	2062	2462	2662	2862	3262	4462	5662	6862
4-1 1/4											
4-1 1/4	0866	1066	1266	2066	2466	2666	2866	3266	4466	5666	6866
4-1 1/4											
4-1 1/4	0870	1070	1270	2070	2470	2670	2870	3270	4470	5670	6870

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*


FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*


FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
 PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MAS. OPENING.
 *ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
 ADD ADDITIONAL 1 3/32" FOR BELLY SILL

Pinnacle Series

DOUBLE HUNG - PICTURE

ELEVATIONS

SCALE: 1/8" = 1'-0"

		1-4 3/4	1-6 3/4	1-8 3/4	2-4 3/4	2-8 3/4	2-10 3/4	3-0 3/4	3-4 3/4	4-4 3/4
Mas. Opp. Primed Mas. Opp. Clad Rough Opp. Frame Glass		1-2 1/8	1-4 1/8	1-6 1/8	2-2 1/8	2-6 1/8	2-8 1/8	2-10 1/8	3-2 1/8	4-2 1/8
		1-2 1/8	1-4 1/8	1-6 1/8	2-2 1/8	2-6 1/8	2-8 1/8	2-10 1/8	3-2 1/8	4-2 1/8
		1-1 3/8	1-3 3/8	1-5 3/8	2-1 3/8	2-5 3/8	2-7 3/8	2-9 3/8	3-1 3/8	4-1 3/8
		8	10	12	20	24	26	28	32	44
6-10 13/16	6-9 1/4 6-9 1/4 6-8 3/4 73 1/2									
		0874	1074	1274	2074	2474	2674	2874	3274	4474
7-2 13/16	7-1 1/4 7-1 1/4 7-0 3/4 77 1/2									
		0878	1078	1278	2078	2478	2678	2878	3278	4478
7-6 13/16	7-5 1/4 7-5 1/4 7-4 3/4 81 1/2									
		0882	1082	1282	2082	2482	2682	2882	3282	4482
7-10 13/16	7-9 1/4 7-9 1/4 7-8 3/4 85 1/2									
		0886	1086	1286	2086	2486	2686	2886	3286	4486
8-2 13/16	8-1 1/4 8-1 1/4 8-0 3/4 89 1/2									
		0890	1090	1290	2090	2490	2690	2890	3290	4490

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*


FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*


FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MAS. OPENING.
*ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 3/32" FOR BELLY SILL

Pinnacle Series

DOUBLE HUNG - TRANSOM

ELEVATIONS

SCALE: 1/8" = 1'-0"

CLAD (IN SASH)

Mas. Opp. Clad	1-10 1/8	2-2 1/8	2-6 1/8	2-8 1/8	2-10 1/8	3-0 1/8	3-2 1/8	3-6 1/8	3-10 1/8	4-0 1/8	4-2 1/8	5-2 1/8
Rough Opp.	1-10 1/8	2-2 1/8	2-6 1/8	2-8 1/8	2-10 1/8	3-0 1/8	3-2 1/8	3-6 1/8	3-10 1/8	4-0 1/8	4-2 1/8	5-2 1/8
Frame	1-9 3/8	2-1 3/8	2-5 3/8	2-7 3/8	2-9 3/8	2-11 3/8	3-1 3/8	3-5 3/8	3-9 3/8	3-11 3/8	4-1 3/8	5-1 3/8
Glass	17 3/8	21 3/8	25 3/8	27 3/8	29 3/8	31 3/8	33 3/8	37 3/8	41 3/8	43 3/8	45 3/8	57 3/8
1-0 1/2												
1-2 1/2												
1-4 1/2												
1-6 1/2												
2-0 1/2												
2-6 1/2												
3-0 1/2												

PRIMED (IN SASH)

Mas. Opp. Primed	2-0 3/4	2-4 3/4	2-8 3/4	2-10 3/4	3-0 3/4	3-2 3/4	3-4 3/4	3-8 3/4	4-0 3/4	4-4 3/4	5-4 3/4	6-4 3/4
Rough Opp.	1-10 1/8	2-2 1/8	2-6 1/8	2-8 1/8	2-10 1/8	3-0 1/8	3-2 1/8	3-6 1/8	3-10 1/8	4-2 1/8	5-2 1/8	6-2 1/8
Frame	1-9 3/8	2-1 3/8	2-5 3/8	2-7 3/8	2-9 3/8	2-11 3/8	3-1 3/8	3-5 3/8	3-9 3/8	4-1 3/8	5-1 3/8	6-1 3/8
Glass	16	20	24	26	28	30	32	36	40	44	56	68
1-4 5/8												
1-6 5/8												
1-8 5/8												
1-10 5/8												
2-4 5/8												
2-10 5/8												
3-4 5/8												

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
 PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MAS. OPENING.
 *ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
 ADD ADDITIONAL 1 3/32" FOR BELLY SILL

OTHER GRILLE PATTERNS



PRAIRIE



PLAZA

Pinnacle Series


SINGLE HUNG - ORIEL

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opg. Primed	2-0 3/4	2-4 3/4	2-8 3/4	3-0 3/4	3-4 3/4
	Mas. Opg. Clad	1-10 1/8	2-2 1/8	2-6 1/8	2-10 1/8	3-2 1/8
	Rough Opg.	1-10 1/8	2-2 1/8	2-6 1/8	2-10 1/8	3-2 1/8
	Frame	1-9 3/8	2-1 3/8	2-5 3/8	2-9 3/8	3-1 3/8
	Glass	16	20	24	28	32
7-1 9/16						
7-0		16/4628	20/4628	24/4628	28/4628	32/4628
7-0						
6-11 1/2						
28-46 3/4						

OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

7-7 9/16						
7-6		16/5228	20/5228	24/5228	28/5228	32/5228
7-6						
7-5 1/2						
28-52 3/4						

8-1 9/16						
8-0		16/5828	20/5828	24/5828	28/5828	32/5828
8-0						
7-11 1/2						
28-58 3/4						

NOTES:











CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

SINGLE HUNG - SEGMENT TOP

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Primed Mas. Opg. Clad Rough Opg. Frame Glass	2-8 3/4 2-6 1/8 2-6 1/8 2-5 3/8 24	3-0 3/4 2-10 1/8 2-10 1/8 2-9 3/8 28	3-4 3/4 3-2 1/8 3-2 1/8 3-1 3/8 32
4-10 5/8 4-9 1/16 4-9 1/16 4-8 9/16 22-26	 2422	 2822	 3222
5-2 5/8 5-1 1/16 5-1 1/16 5-0 9/16 24-28	 2424	 2824	 3224
5-6 5/8 5-5 1/16 5-5 1/16 5-4 9/16 26-30	 2426	 2826	 3226
5-10 5/8 5-9 1/16 5-9 1/16 5-8 9/16 28-32	 2428	 2828	 3228
6-2 5/8 6-1 1/16 6-1 1/16 6-0 9/16 30-34	 2430	 2830	 3230
6-6 5/8 6-5 1/16 6-5 1/16 6-4 9/16 32-36	 2432	 2832	 3232
6-10 5/8 6-9 1/16 6-9 1/16 6-8 9/16 34-38	 2434	 2834	 3234

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTES:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:










CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

SINGLE HUNG - SEGMENT TOP

ELEVATIONS

SCALE: 1/8" = 1'-0"

	2-8 3/4	3-0 3/4	3-4 3/4
	2-6 1/8	2-10 1/8	3-2 1/8
	2-6 1/8	2-10 1/8	3-2 1/8
	2-5 3/8	2-9 3/8	3-1 3/8
	24	28	32
Mas. Opp. Primed			
Mas. Opp. Clad			
Rough Opp.			
Frame			
Glass			
NA			
NA			
7-5 1/16			
7-4 9/16			
38-41 31/32			
			
	2438*	2838*	3238*
NA			
NA			
7-9 1/16			
7-8 9/16			
40-43 31/32			
			
	2440*	2840*	3240*
NA			
NA			
8-1 1/16			
8-0 9/16			
45-45 31/32			
			
	2442*	2842*	3242*

UNIT SIZE INFORMATION

FOR CLAD BRICKMOLD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

*CONCEALED PRODUCTS ONLY

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

SINGLE HUNG - ROUND TOP

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Primed Mas. Opg. Clad Rough Opg. Frame Glass	5-6 15/16 5-5 3/8 5-5 3/8 5-4 7/8 22	2-8 3/4 2-6 1/8 2-6 1/8 2-5 3/8 24	2422	5-8 15/16 5-7 3/8 5-7 3/8 5-6 7/8 22	2-8 3/4 2-6 1/8 2-10 1/8 2-9 3/8 28	2822	5-10 15/16 5-9 3/8 5-9 3/8 5-8 7/8 22	3-4 3/4 3-2 1/8 3-2 1/8 3-1 3/8 32	3222
	5-10 15/16 5-9 3/8 5-9 3/8 5-8 7/8 24	6-0 15/16 5-11 3/8 5-11 3/8 5-10 7/8 24	2424	6-0 15/16 5-11 3/8 5-11 3/8 5-10 7/8 24	6-2 15/16 6-1 3/8 6-1 3/8 6-0 7/8 24	2824	6-2 15/16 6-1 3/8 6-1 3/8 6-0 7/8 24	6-2 15/16 6-1 3/8 6-1 3/8 6-0 7/8 24	3224
	6-2 15/16 6-1 3/8 6-1 3/8 6-0 7/8 26	6-4 15/16 6-3 3/8 6-3 3/8 6-2 7/8 26	2426	6-4 15/16 6-3 3/8 6-3 3/8 6-2 7/8 26	6-6 15/16 6-5 3/8 6-5 3/8 6-4 7/8 26	2826	6-6 15/16 6-5 3/8 6-5 3/8 6-4 7/8 26	6-6 15/16 6-5 3/8 6-5 3/8 6-4 7/8 26	3226
	6-6 15/16 6-5 3/8 6-5 3/8 6-4 7/8 28	6-8 15/16 6-7 3/8 6-7 3/8 6-6 7/8 28	2428	6-8 15/16 6-7 3/8 6-7 3/8 6-6 7/8 28	6-10 15/16 6-9 3/8 6-9 3/8 6-8 7/8 28	2828	6-10 15/16 6-9 3/8 6-9 3/8 6-8 7/8 28	6-10 15/16 6-9 3/8 6-9 3/8 6-8 7/8 28	3228
	6-10 15/16 6-9 3/8 6-9 3/8 6-8 7/8 30	7-0 15/16 6-11 3/8 6-11 3/8 6-10 7/8 30	2430	7-0 15/16 6-11 3/8 6-11 3/8 6-10 7/8 30	7-2 15/16 7-1 3/8 7-1 3/8 7-0 7/8 30	2830	7-2 15/16 7-1 3/8 7-1 3/8 7-0 7/8 30	7-2 15/16 7-1 3/8 7-1 3/8 7-0 7/8 30	3230
	7-2 15/16 7-1 3/8 7-1 3/8 7-0 7/8 32	7-4 15/16 7-3 3/8 7-3 3/8 7-2 7/8 32	2432	7-4 15/16 7-3 3/8 7-3 3/8 7-2 7/8 32	7-6 15/16 7-5 3/8 7-5 3/8 7-4 7/8 32	2832	7-6 15/16 7-5 3/8 7-5 3/8 7-4 7/8 32	7-6 15/16 7-5 3/8 7-5 3/8 7-4 7/8 32	3232
	7-6 15/16 7-5 3/8 7-5 3/8 7-4 7/8 34	7-8 15/16 7-7 3/8 7-7 3/8 7-6 7/8 34	2434	7-8 15/16 7-7 3/8 7-7 3/8 7-6 7/8 34	7-10 15/16 7-9 3/8 7-9 3/8 7-8 7/8 34	2834	7-10 15/16 7-9 3/8 7-9 3/8 7-8 7/8 34	7-10 15/16 7-9 3/8 7-9 3/8 7-8 7/8 34	3234
	7-10 15/16 7-9 3/8 7-9 3/8 7-8 7/8 36	8-0 15/16 7-11 3/8 7-11 3/8 7-10 7/8 36	2436	8-0 15/16 7-11 3/8 7-11 3/8 7-10 7/8 36	8-2 15/16 8-1 3/8 8-1 3/8 8-0 7/8 36	2836	8-2 15/16 8-1 3/8 8-1 3/8 8-0 7/8 36	8-2 15/16 8-1 3/8 8-1 3/8 8-0 7/8 36	3236

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL
CASING OPTIONS MAY BE LIMITED BY SIZE DUE
TO MINIMUM RADIUS RESTRICTIONS.

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:


CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.

Pinnacle Series

SINGLE HUNG - ROUND TOP

ELEVATIONS

SCALE: 1/8" = 1'-0"

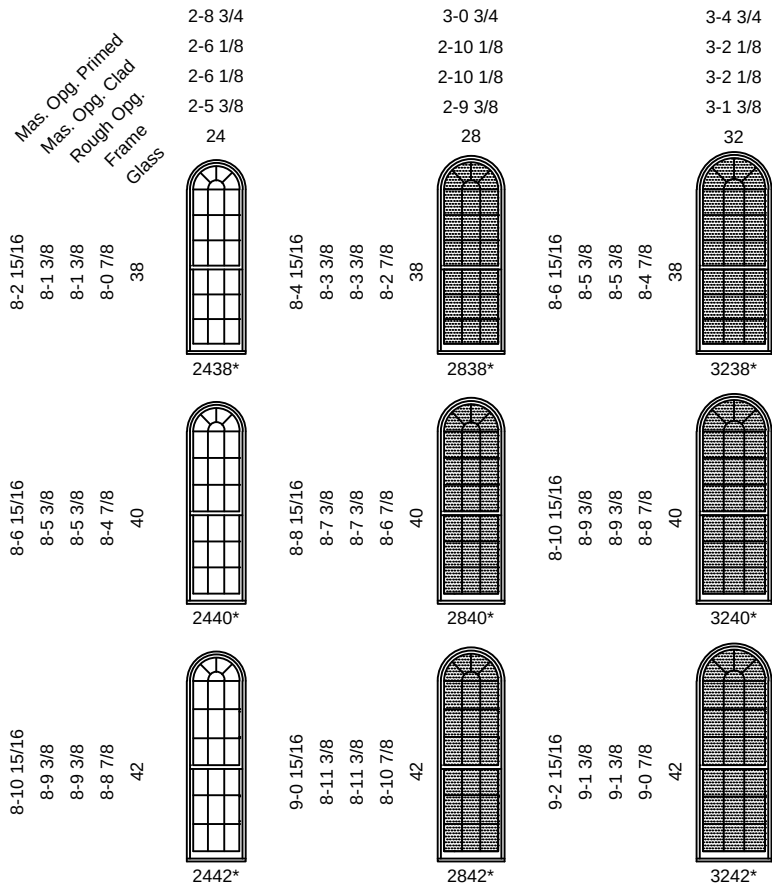

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

FOR PRIMED WM-180

- ADD 2 19/32" TO FRAME WIDTH
- ADD 1 9/16" TO FRAME HEIGHT*

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 5/8" TO FRAME WIDTH
- ADD 3 1/16" TO FRAME HEIGHT*

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 5/8" TO FRAME WIDTH
- ADD 4 1/16" TO FRAME HEIGHT*

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 5/8" TO FRAME WIDTH
- ADD 5 1/16" TO FRAME HEIGHT*

FOR PRIMED WILLIAMSBURG

- ADD 5 1/8" TO FRAME WIDTH
- ADD 2 13/16" TO FRAME HEIGHT*

FOR PRIMED PLANTATION

- ADD 5 5/8" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT*

* ADD ADDITIONAL 15/16" FOR BULLNOSE SILL
ADD ADDITIONAL 1 1/32" FOR BELLY SILL
CASING OPTIONS MAY BE LIMITED BY SIZE DUE
TO MINIMUM RADIUS RESTRICTIONS.

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

*CONCEALED PRODUCTS ONLY

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS VERIFY LOCAL CODES.