
















Pinnacle Series

PRIMED PATIO DOOR - INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Primed Rough Opp. Frame Glass	2-9 7/16 2-6 15/16 2-6 3/16 20	5-3 1/4 5-0 3/4 5-0 20	7-9 1/16 7-6 9/16 7-5 13/16 20	8-2 3/8 7-11 7/8 7-11 1/8 11 1/2 - 20 - 11 1/2	9-2 7/8 9-0 3/8 8-11 5/8 14 - 20 - 14	10-2 7/8 10-0 3/8 9-11 5/8 20
6-9 1/4 6-8 6-7 1/2 63 7/8						
	2668	5068	7668	16-50-1668	20-50-2068	26-50-2668
7-0 1/8 6-10 7/8 6-10 3/8 66 3/4						
	26610	50610	76610	16-50-16610	20-50-20610	26-50-26610
8-1 1/8 7-11 7/8 7-11 3/8 79 3/4						
	2680	5080	7680			

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER
DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A

NOTE:


THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS




PRAIRIE




PLAZA


OTHER PANEL OPTIONS




1/2 LITE
PANEL



3/4 LITE
PANEL



1/2 LITE
DIVIDED PANEL



3/4 LITE
DIVIDED PANEL

UNIT SIZE INFORMATION

FOR PRIMED WM-180

- ADD 2 1/2" TO FRAME WIDTH
- ADD 1 1/4" TO FRAME HEIGHT

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 17/32" TO FRAME WIDTH
- ADD 2 3/4" TO FRAME HEIGHT

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 17/32" TO FRAME WIDTH
- ADD 3 3/4" TO FRAME HEIGHT

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 17/32" TO FRAME WIDTH
- ADD 4 3/4" TO FRAME HEIGHT

FOR PRIMED WILLIAMSBURG

- ADD 5 1/32" TO FRAME WIDTH
- ADD 2 15/32" TO FRAME HEIGHT

FOR PRIMED PLANTATION

- ADD 5 17/32" TO FRAME WIDTH
- ADD 4 3/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:












PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

PRIMED PATIO DOOR - INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Primed Rough Opp. Frame Glass	2-11 7/16	5-7 1/4	8-3 1/16	8-2 3/8
	2-8 15/16	5-4 3/4	8-0 9/16	7-11 7/8
	2-8 3/16	5-4	7-11 13/16	7-11 1/8
	22	22	22	9 1/2 - 22 - 9 1/2
6-9 1/4 6-8 6-7 1/2 6-3 7/8				
	2868	5468	8068	14-54-1468
				
	28610	54610	80610	14-54-14610
8-1 1/8 7-11 7/8 7-11 3/8 7-9 3/4				
	2880	5480	8080	

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

UNIT SIZE INFORMATION

FOR PRIMED WM-180

- ADD 2 1/2" TO FRAME WIDTH
- ADD 1 1/4" TO FRAME HEIGHT

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 17/32" TO FRAME WIDTH
- ADD 2 3/4" TO FRAME HEIGHT

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 17/32" TO FRAME WIDTH
- ADD 3 3/4" TO FRAME HEIGHT

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 17/32" TO FRAME WIDTH
- ADD 4 3/4" TO FRAME HEIGHT

FOR PRIMED WILLIAMSBURG

- ADD 5 1/32" TO FRAME WIDTH
- ADD 2 15/32" TO FRAME HEIGHT


FOR PRIMED PLANTATION

- ADD 5 17/32" TO FRAME WIDTH
- ADD 4 3/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING


OTHER GRILLE PATTERNS



PRAIRIE

PLAZA

OTHER PANEL OPTIONS

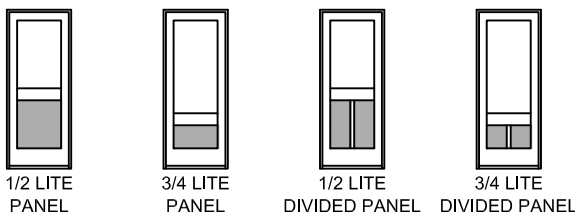

1/2 LITE
PANEL

3/4 LITE
PANEL

1/2 LITE
DIVIDED PANEL

3/4 LITE
DIVIDED PANEL

NOTES:

PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

PRIMED PATIO DOOR - INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Primed
Rough Opg.
Frame
Glass

3-3 7/16
3-0 15/16
3-0 3/16
26


6-3 1/4
6-0 3/4
6-0
26

9-3 1/16
9-0 9/16
8-11 13/16
26


9-2 3/8
8-11 7/8
8-11 1/8
11 1/2 - 26 - 11 1/2

10-2 7/8
10-0 3/8
9-11 5/8
14 - 26 - 14


6-9 1/4
6-8
6-7 1/2
63 7/8




3068




6068



9068




16-60-1668




20-60-2068


7-0 1/8
6-10 7/8
6-10 3/8
66 3/4




30610




60610



90610




16-60-16610




20-60-20610


8-1 1/8
7-11 7/8
7-11 3/8
79 3/4



3080



6080



9080

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

UNIT SIZE INFORMATION

FOR PRIMED WM-180

- ADD 2 1/2" TO FRAME WIDTH
- ADD 1 1/4" TO FRAME HEIGHT

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 17/32" TO FRAME WIDTH
- ADD 2 3/4" TO FRAME HEIGHT

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 17/32" TO FRAME WIDTH
- ADD 3 3/4" TO FRAME HEIGHT

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 17/32" TO FRAME WIDTH
- ADD 4 3/4" TO FRAME HEIGHT

FOR PRIMED WILLIAMSBURG

- ADD 5 1/32" TO FRAME WIDTH
- ADD 2 15/32" TO FRAME HEIGHT

FOR PRIMED PLANTATION

- ADD 5 17/32" TO FRAME WIDTH
- ADD 4 3/4" TO FRAME HEIGHT

NOTE:


ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

Mas. Opg. Primed
Rough Opg.
Frame
Glass


11-2 7/8
11-0 3/8
10-11 5/8
20 - 26 - 20

12-2 7/8
12-0 3/8
11-11 5/8
26

6-9 1/4
6-8
6-7 1/2
63 7/8




26-60-2668




30-60-3068

7-0 1/8
6-10 7/8
6-10 3/8
66 3/4



26-60-26610



30-60-30610

NOTES:

PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

PRIMED PATIO DOOR - INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


Mas. Opg. Primed
Rough Opg.
Frame
Glass

3-4 15/16
3-2 7/16
3-1 11/16
27 1/2


6-6 1/4
6-3 3/4
6-3
27 1/2

4-3 1/4
4-0 3/4
4-0
14


6-9 1/4
6-8
6-7 1/2
63 7/8



3268




6468




4068

BI-HINGE ONLY


7-0 1/8
6-10 7/8
6-10 3/8
66 3/4



32610




64610




40610

BI-HINGE ONLY


8-1 1/8
7-11 7/8
7-11 3/8
79 3/4



3280



6480



4080


BI-HINGE ONLY

NOTE:


THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS




PRAIRIE




PLAZA


OTHER PANEL OPTIONS




1/2 LITE
PANEL



3/4 LITE
PANEL



1/2 LITE
DIVIDED PANEL



3/4 LITE
DIVIDED PANEL

UNIT SIZE INFORMATION

FOR PRIMED WM-180

- ▣ ADD 2 1/2" TO FRAME WIDTH
- ▣ ADD 1 1/4" TO FRAME HEIGHT

FOR PRIMED 3 1/2" FLAT CASING

- ▣ ADD 5 17/32" TO FRAME WIDTH
- ▣ ADD 2 3/4" TO FRAME HEIGHT

FOR PRIMED 4 1/2" BACKBAND

- ▣ ADD 7 17/32" TO FRAME WIDTH
- ▣ ADD 3 3/4" TO FRAME HEIGHT

FOR PRIMED 5 1/2" FLAT CASING

- ▣ ADD 9 17/32" TO FRAME WIDTH
- ▣ ADD 4 3/4" TO FRAME HEIGHT

FOR PRIMED WILLIAMSBURG

- ▣ ADD 5 1/32" TO FRAME WIDTH
- ▣ ADD 2 15/32" TO FRAME HEIGHT

FOR PRIMED PLANTATION

- ▣ ADD 5 17/32" TO FRAME WIDTH
- ▣ ADD 4 3/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

PRIMED INSWING PATIO DOOR - IN-SASH TRANSOMS

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Primed Rough Opp. Frame Glass	2-9 7/16	5-3 1/4	5-3 1/4	7-9 1/16	7-9 1/16
	2-6 15/16	5-0 3/4	5-0 3/4	7-6 9/16	7-6 9/16
	2-6 3/16	5-0	5-0	7-5 13/16	7-5 13/16
	20	49 13/16	20	20	79 5/8
1-2 3/4					
1-5 3/4					
2-1 3/4					
2-0 1/2	2620	5020	5020-2	7620-3	7620
Mas. Opp. Primed Rough Opp. Frame Glass	2-11 7/16	5-7 1/4	5-7 1/4	8-3 1/16	8-3 1/16
	2-8 15/16	5-4 3/4	5-4 3/4	8-0 9/16	8-0 9/16
	2-8 3/16	5-4	5-4	7-11 13/16	7-11 13/16
	22	53 13/16	22	22	85 5/8
1-2 3/4					
1-5 3/4					
2-1 3/4					
2-0 1/2	2820	5420	5420-2	8020-3	8020
Mas. Opp. Primed Rough Opp. Frame Glass	3-3 7/16	6-3 1/4	6-3 1/4	9-3 1/16	9-3 1/16
	3-0 15/16	6-0 3/4	6-0 3/4	9-0 9/16	9-0 9/16
	3-0 3/16	6-0	6-0	8-11 13/16	8-11 13/16
	26	61 13/16	26	26	97 5/8
1-2 3/4					
1-5 3/4					
2-1 3/4					
2-0 1/2	3020	6020	6020-2	9020-3	9020
Mas. Opp. Primed Rough Opp. Frame Glass	3-4 15/16	6-6 1/4	6-6 1/4		
	3-2 7/16	6-3 3/4	6-3 3/4		
	3-1 11/16	6-3	6-3		
	28	65 13/16	28		
1-2 3/4					
1-5 3/4					
2-1 3/4					
2-0 1/2	3220	6420	6420-2		

UNIT SIZE INFORMATION

FOR PRIMED WM-180

- ADD 2 1/2" TO FRAME WIDTH
- ADD 1 1/4" TO FRAME HEIGHT

FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 17/32" TO FRAME WIDTH
- ADD 2 3/4" TO FRAME HEIGHT

FOR PRIMED 4 1/2" BACKBAND

- ADD 7 17/32" TO FRAME WIDTH
- ADD 3 3/4" TO FRAME HEIGHT

FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 17/32" TO FRAME WIDTH
- ADD 4 3/4" TO FRAME HEIGHT

FOR PRIMED WILLIAMSBURG

- ADD 5 1/32" TO FRAME WIDTH
- ADD 2 15/32" TO FRAME HEIGHT

FOR PRIMED PLANTATION

- ADD 5 17/32" TO FRAME WIDTH
- ADD 4 3/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD