

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS
SCALE: 1/8" = 1'-0"

	2-7	5-0 13/16	7-6 5/8	7-11 15/16	9-0 7/16	10-0 7/16
	2-7	5-0 13/16	7-6 5/8	7-11 15/16	9-0 7/16	10-0 7/16
Mas. Opp. Clad	2-6 1/4	5-0 1/16	7-5 7/8	7-11 3/16	8-11 11/16	9-11 11/16
Rough Opp.	23	23	23	11 1/2 - 23 - 11 1/2	14 - 23 - 14	23
Frame						
Glass						
6-8						
6-8	2668	5068	7668	16-50-1668	20-50-2068	26-50-2668
6-7 1/2						
67 1/4						
6-10 7/8						
6-10 7/8	26610	50610	76610	16-50-16610	20-50-20610	26-50-26610
6-10 3/8						
70 1/8						
7-11 7/8						
7-11 7/8	2680	5080	7680			
7-11 3/8						
83 1/8						

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS				
PRAIRIE	DIAMOND	SINGLE PLAZA	DOUBLE PLAZA	TRIPLE PLAZA

UNIT SIZE INFORMATION
FOR CLAD BRICKMOULD
▣ ADD 2 13/16" TO FRAME WIDTH
▣ ADD 1 13/32" TO FRAME HEIGHT
FOR CLAD WILLIAMSBURG
▣ ADD 6 1/2" TO FRAME WIDTH
▣ ADD 3 1/4" TO FRAME HEIGHT
NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING












NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opg. Clad Rough Opg. Frame Glass				
		2-9	5-4 13/16	8-0 5/8	7-11 15/16
		2-9	5-4 13/16	8-0 5/8	7-11 15/16
		2-8 1/4	5-4 1/16	7-11 7/8	7-11 3/16
		25	25	25	9 1/2 - 25 - 9 1/2
6-8					
		2868	5468	8068	14-54-1468
6-10 7/8					
		28610	54610	80610	14-54-14610
7-11 7/8					
		2880	5480	8080	

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

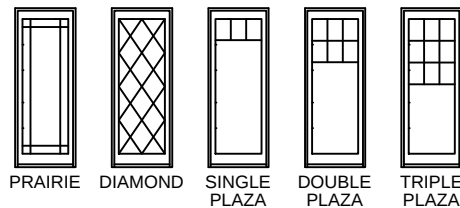OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME














Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Clad
Rough Opp.
Frame
Glass


	3-1	6-0 13/16	9-0 5/8	8-11 15/16	10-0 7/16
	3-1	6-0 13/16	9-0 5/8	8-11 15/16	10-0 7/16
	3-0 1/4	6-0 1/16	8-11 7/8	8-11 3/16	9-11 11/16
	29	29	29	11 1/2 - 29 - 11 1/2	17 - 29 - 17
6-8					
	3068	6068	9068	16-60-1668	20-60-2068
6-8					
	30610	60610	90610	16-60-16610	20-60-20610
6-7 1/2					
67 1/4	3080	6080	9080		

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

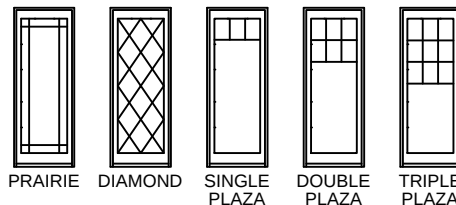OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

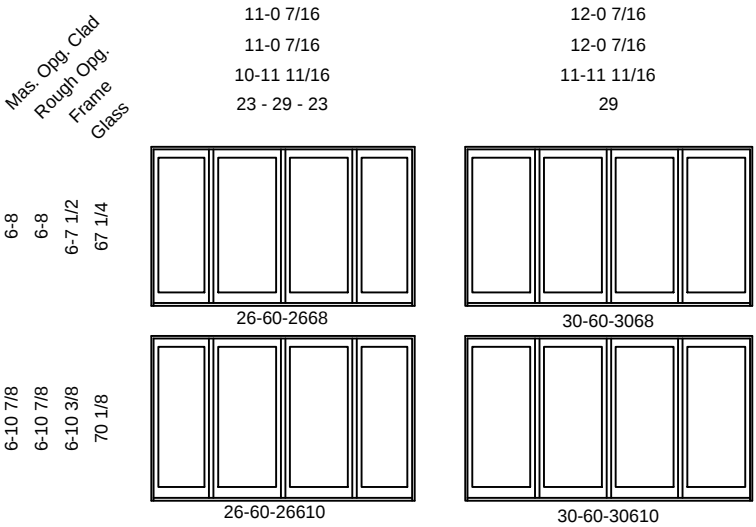
NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS
SCALE: 1/8" = 1'-0"












Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


	Mas. Opg. Clad	3-2 1/2	6-3 13/16	4-0 3/4
	Rough Opg.	3-2 1/2	6-3 13/16	4-0 3/4
	Frame	3-1 3/4	6-3 1/16	4-0
	Glass	30 1/2	30 1/2	17
6-8				
6-8				
6-7 1/2				
67 1/4				
		3268	6468	4068 BI-HINGE ONLY
6-10 7/8				
6-10 7/8				
6-10 3/8				
70 1/8				
		32610	64610	40610 BI-HINGE ONLY
7-11 7/8				
7-11 7/8				
7-11 3/8				
83 1/8				
		3280	6480	4080 BI-HINGE ONLY

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

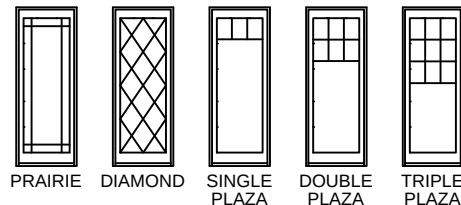OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS
 SCALE: 1/8" = 1'-0"

		1-3	1-5	1-7	2-1 1/4
	Mas. Opp. Clad	1-3	1-5	1-7	2-1 1/4
	Rough Opp.	1-2	1-4	1-6	2-0 1/4
	Frame	7 1/2	9 1/2	11 1/2	17
	Glass				
					
6-8		1268	1468	1668	2068
6-8					
6-7 1/2					
67 1/4					
					
6-11		12610	14610	16610	20610
6-11					
6-10 1/2					
70 1/8					
					
8-0		1280	1480	1680	2080
8-0					
7-11 3/8					
83 1/8					

UNIT SIZE INFORMATION

- FOR CLAD BRICKMOULD

 - ADD 2 13/16" TO FRAME WIDTH
 - ADD 1 13/32" TO FRAME HEIGHT
- FOR CLAD WILLIAMSBURG

 - ADD 6 1/2" TO FRAME WIDTH
 - ADD 3 1/4" TO FRAME HEIGHT

NOTE:
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
 TO CALCULATE MASONRY OPENING

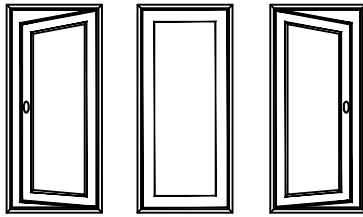
NOTES:
 CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
 ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING


HANDING CONFIGURATIONS (ALL HANDINGS ARE VIEWED FROM THE EXTERIOR)

SINGLE DOOR




XR O XL

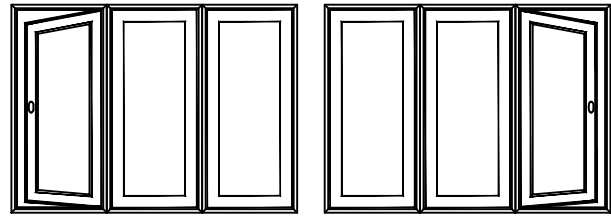THREE UNIT DOOR




XR-O-O O-O-XL

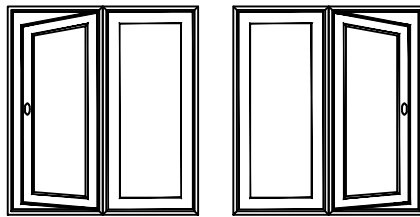
DOUBLE UNIT DOOR




XR-O O-XL

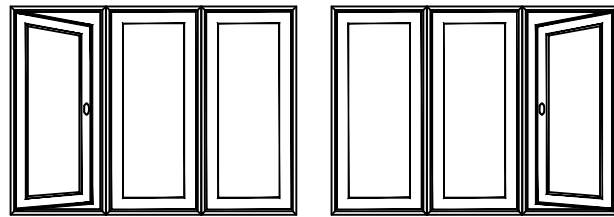

XL-O-O O-O-XR

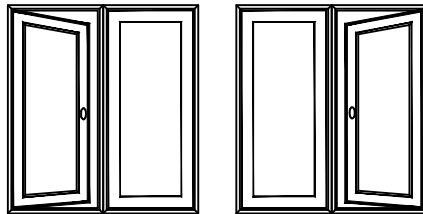


XL-O O-XR

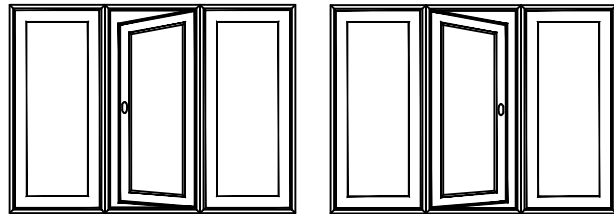


O-XR-O O-XL-O


BI-HINGE DOOR



XO OR OX




O-XO OR O-OX




XO-O OR OX-O

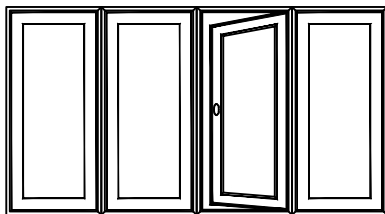
FOUR UNIT DOOR



O-O-XR-O

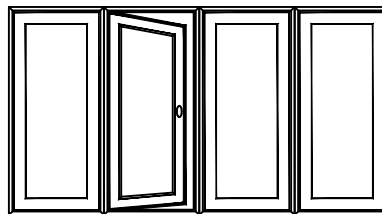

O-XL-O-O

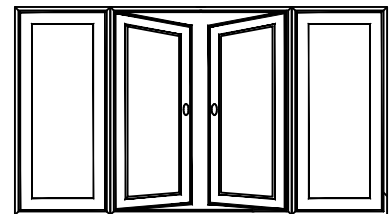

O-XO-O OR O-OX-O


FLANKER UNITS MUST BE STATIONARY FOR QUAD HANDINGS

Pinnacle Series


CLAD PATIO DOOR - NARROW INSWING

SCREEN OPTIONS


SWINGING SCREEN OPTION




XR *



XO *




XL *




OX *

SLIDING SCREEN OPTION




X-O +




O-X +


NO SCREEN AVAILABLE (IF ORDERED AS ONE FRAME)




O-XO +




XO-O +




X-O-O +




O-O-X +




O-X-O +




O-XO-O +

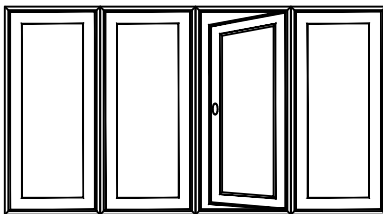

O-O-X-O +

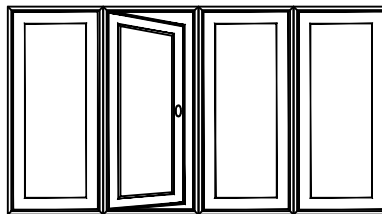

O-X-O-O +

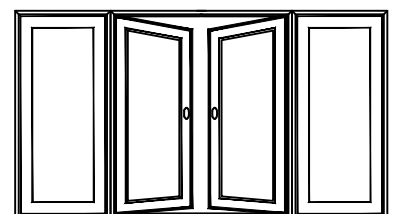

O-XO-O +

* Swing screens will also work on these configurations if they are mulled to other units

+ Standard handing configurations as shown are continuous head and sill. Swing screens can be applied on these units if operating doors are ordered separately and mulled to the stationary doors.

Pinnacle Series

CLAD INSWING PATIO DOOR - IN-SASH TRANSOMS

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Clad	2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
Rough Opg.	2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
Frame	2-6 1/4	5-0 1/16	5-0 1/16	7-5 7/8	7-5 7/8
Glass	23	52 13/16	23	23	82 5/8
1-1 1/2					
1-4 1/2					
2-0 1/2					
2-0 1/2	2611	5011	5011-2	7611-3	
2-0 1/2	2614	5014	5014-2	7614-3	7614
2-0 1/2	2620	5020	5020-2	7620-3	7620
Mas. Opg. Clad	2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8
Rough Opg.	2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8
Frame	2-8 1/4	5-4 1/16	5-4 1/16	7-11 7/8	7-11 7/8
Glass	25	56 13/16	25	25	88 5/8
1-1 1/2					
1-4 1/2					
2-0 1/2					
1-1 1/2	2811	5411	5411-2	8011-3	
1-4 1/2	2814	5414	5414-2	8014-2	8014
2-0 1/2	2820	5420	5420-2	8020-3	8020
Mas. Opg. Clad	3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
Rough Opg.	3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
Frame	3-0 1/4	6-0 1/16	6-0 1/16	8-11 7/8	8-11 7/8
Glass	29	64 13/16	29	29	100 5/8
1-1 1/2					
1-4 1/2					
2-0 1/2					
1-1 1/2	3011	6011	6011-2	9011-3	
1-4 1/2	3014	6014	6014-2	9014-3	9014
2-0 1/2	3020	6020	6020-2	9020-3	9020
Mas. Opg. Clad	3-2 1/2	6-3 13/16	6-4 13/16		
Rough Opg.	3-2 1/2	6-3 13/16	6-4 13/16		
Frame	3-1 3/4	6-3 1/16	6-4 1/16		
Glass	31	68 13/16	31		
1-1 1/2					
1-4 1/2					
2-0 1/2					
1-1 1/2	3211	6411	6411-2		
1-4 1/2	3214	6414	6014-2		
2-0 1/2	3220	6420	6420-2		

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:
















CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


	2-7	5-0 13/16	7-6 5/8	8-0 1/16	9-0 9/16	10-0 9/16
Mas. Opg. Clad	2-7	5-0 13/16	7-6 5/8	8-0 1/16	9-0 9/16	10-0 9/16
Rough Opg.	2-6 1/4	5-0 1/16	7-5 7/8	7-11 5/16	8-11 13/16	9-11 13/16
Frame	23	23	23	11 1/2 - 23 - 11 1/2	17 - 23 - 17	23
Glass						
6-7 1/2						
6-7 1/2	2668	5068	7668	16-50-1668	20-50-2068	26-50-2668
6-7						
67 1/4						
6-10 3/8						
6-10 3/8	26610	50610	76610	16-50-16610	20-50-20610	26-50-26610
6-9 7/8						
70 1/8						
7-11 3/8						
7-11 3/8	2680	5080	7680			
7-10 7/8						
83 1/8						

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

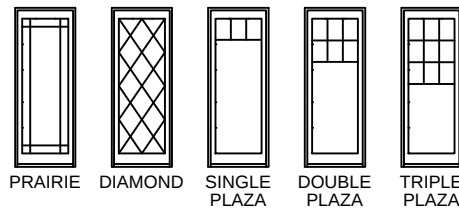OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:










CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


Mas. Opg. Clad Rough Opg. Frame Glass	2-9	5-4 13/16	8-0 5/8
	2-9	5-4 13/16	8-0 5/8
	2-8 1/4	5-4 1/16	7-11 7/8
	25	25	25
6-7 1/2 6-7 1/2 6-7 67 1/4	 2868	 5468	 8068
6-10 3/8 6-10 3/8 6-9 7/8 70 1/8	 28610	 54610	 80610
7-11 3/8 7-11 3/8 7-10 7/8 83 1/8	 2880	 5480	 8080

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

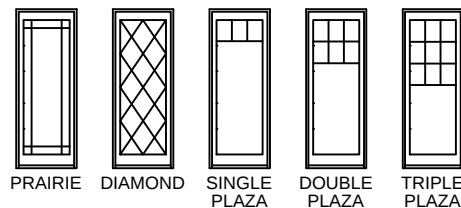OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:




















CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

Mas. Opg. Clad Rough Opg. Frame Glass	3-1		6-0 13/16		9-0 5/8		9-0 1/16		10-0 9/16	
	3-1		6-0 13/16		9-0 5/8		9-0 1/16		10-0 9/16	
	3-0 1/4		6-0 1/16		8-11 7/8		8-11 5/16		9-11 13/16	
	29		29		29		11 1/2 - 29 - 11 1/2		17 - 29 - 17	
6-7 1/2										
6-7 1/2	3068		6068		9068		16-60-1668		20-60-2068	
6-10 3/8										
6-10 3/8	30610		60610		90610		16-60-16610		20-60-20610	
6-9 7/8										
70 1/8	3080		6080		9080					
7-11 3/8										
7-11 3/8	3080		6080		9080					
7-10 7/8										
83 1/8	3080		6080		9080					

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

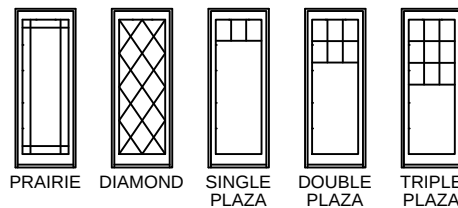OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

Mas. Opg. Clad
Rough Opg.
Frame
Glass


11-0 9/16
11-0 9/16
10-11 13/16
23 - 29 - 23

12-0 9/16
12-0 9/16
11-11 13/16
29

6-7 1/2
6-7 1/2
6-7
67 1/4




26-60-3068




30-30-3068

6-10 3/8
6-10 3/8
6-9 7/8
70 1/8



26-60-30610



30-60-30610

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE
PLAZA



DOUBLE
PLAZA



TRIPLE
PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:










CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


	Mas. Opg. Clad	3-2 1/2	6-3 13/16	4-0 9/16
	Rough Opg.	3-2 1/2	6-3 13/16	4-0 9/16
	Frame	3-1 3/4	6-3 1/16	4-0 1/16
	Glass	30 1/2	30 1/2	17
6-7 1/2				
6-7 1/2		3268	6468	4068
6-7				BI-HINGE ONLY
67 1/4				
6-10 3/8				
6-10 3/8		32610	64610	40610
6-9 7/8				BI-HINGE ONLY
70 1/8				
7-11 3/8				
7-11 3/8		3280	6480	4080
7-10 7/8				BI-HINGE ONLY
83 1/8				

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

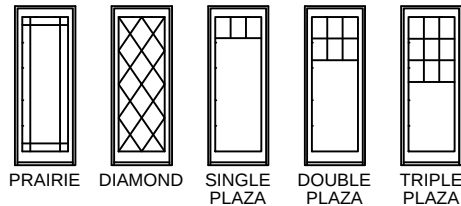OTHER GRILLE PATTERNS



UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

CLAD PATIO DOOR - ADA NARROW OUTSWING

SCALE: 1/8" = 1'-0"

OTHER GRILLE PATTERNS



PRAIRIE DIAMOND SINGLE PLAZA DOUBLE PLAZA TRIPLE PLAZA

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS
SCALE: 1/8" = 1'-0"

	Mas. Opg. Clad Rough Opg. Frame Glass	1-3	1-5	1-7	2-1 1/4
		1-3	1-5	1-7	2-1 1/4
		1-2	1-4	1-6	2-0 1/4
		7 1/2	9 1/2	11 1/2	17
6-7 1/2					
	6-7 1/2	1268	1468	1668	2068
	6-7				
	67 1/4				
6-10 1/2					
	6-10 1/2	12610	14610	16610	20610
	6-9 7/8				
	70 1/8				
7-11 1/2					
	7-11 1/2	1280	1480	1680	2080
	7-10 7/8				
	83 1/8				

UNIT SIZE INFORMATION

- FOR CLAD BRICKMOULD

 - ADD 2 13/16" TO FRAME WIDTH
 - ADD 1 13/32" TO FRAME HEIGHT
- FOR CLAD WILLIAMSBURG

 - ADD 6 1/2" TO FRAME WIDTH
 - ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING


NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series


CLAD PATIO DOOR - NARROW OUTSWING

HANDING CONFIGURATIONS (ALL HANDINGS ARE VIEWED FROM THE EXTERIOR)





SINGLE DOOR





THREE UNIT DOOR

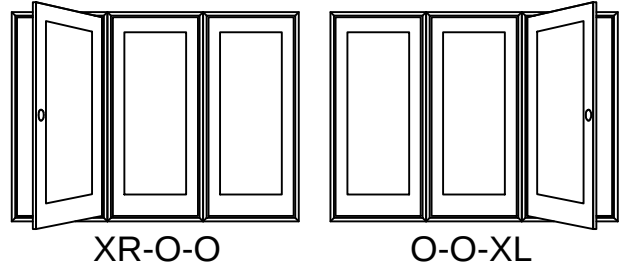




DOUBLE UNIT DOOR

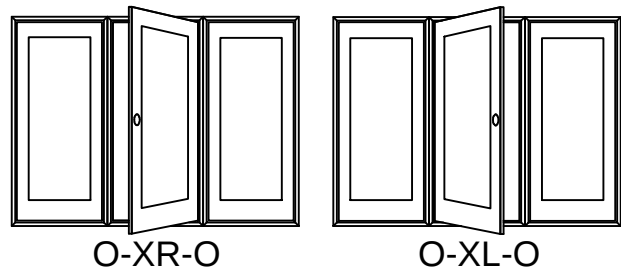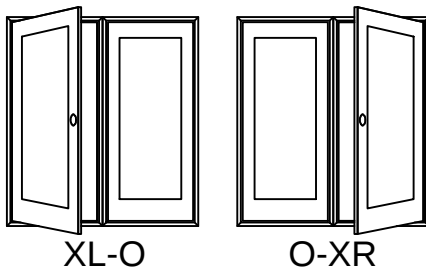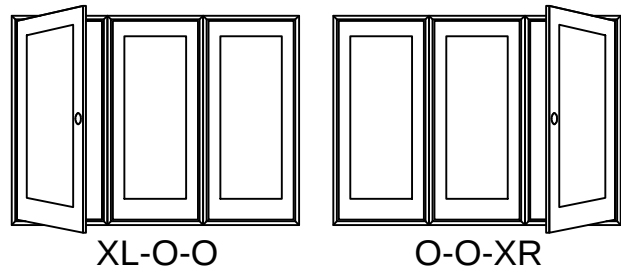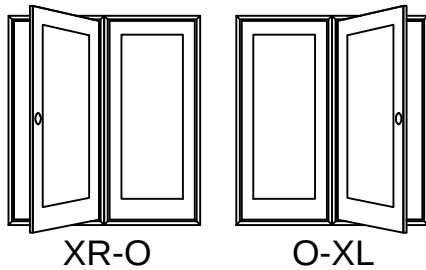

BI-HINGE DOOR

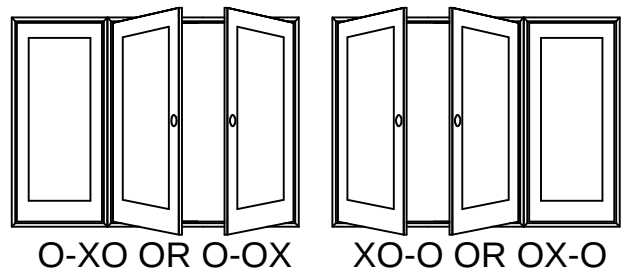

FOUR UNIT DOOR

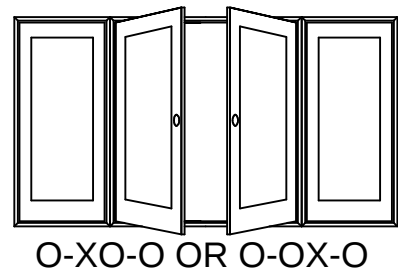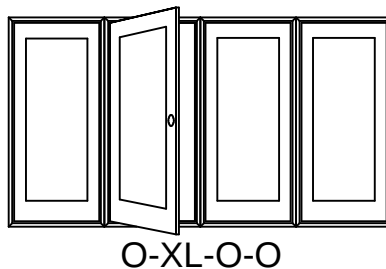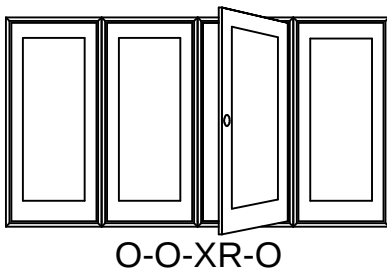

FLANKER UNITS MUST BE STATIONARY FOR QUAD HANDINGS

Pinnacle Series

CLAD OUTSWING PATIO DOOR - IN-SASH TRANSOMS

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Clad Rough Opg. Frame Glass	2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
	2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
	2-6 1/4	5-0 1/16	5-0 1/16	7-5 7/8	7-5 7/8
	23	52 13/16	23	23	82 5/8
1-1 1/2					
1-4 1/2					
2-0 1/2					
2-0 1/2	2611	5011	5011-2	7611-3	
2-0 1/2	2614	5014	5014-2	7614-3	7614
2-0 1/2	2620	5020	5020-2	7620-3	7620
Mas. Opg. Clad Rough Opg. Frame Glass	2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8
	2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8
	2-8 1/4	5-4 1/16	5-4 1/16	7-11 7/8	7-11 7/8
	25	56 13/16	25	25	88 5/8
1-1 1/2					
1-4 1/2					
2-0 1/2					
1-1 1/2	2811	5411	5411-2	8011-3	
1-4 1/2	2814	5414	5414-2	8014-3	8014
2-0 1/2	2820	5420	5420-2	8020-3	8020
Mas. Opg. Clad Rough Opg. Frame Glass	3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
	3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
	3-0 1/4	6-0 1/16	6-0 1/16	8-11 7/8	8-11 7/8
	29	64 13/16	29	29	100 5/8
1-1 1/2					
1-4 1/2					
2-0 1/2					
1-1 1/2	3011	6011	6011-2	9011-3	
1-4 1/2	3014	6014	6014-2	9014-3	9014
2-0 1/2	3020	6020	6020-2	9020-3	9020
Mas. Opg. Clad Rough Opg. Frame Glass	3-2 1/2	6-3 13/16	6-3 13/16		
	3-2 1/2	6-3 13/16	6-3 13/16		
	3-1 3/4	6-3 1/16	6-3 1/16		
	31	68 13/16	31		
1-1 1/2					
1-4 1/2					
2-0 1/2					
1-1 1/2	3211	6411	6411-2		
1-4 1/2	3214	6414	6414-2		
2-0 1/2	3220	6420	6420-2		

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING