

Pinnacle Series


DIRECT SET

ELEVATIONS : OCTAGON

SCALE: NTS

Masonry Opg. Primed
 Masonry Opg. Clad
 Rough Opg.
 Frame
 Glass


2-2 15/16
 2-0 1/2
 2-0 1/2
 2-0
 21



OCT 24

2-3 9/16
 2-0 3/4
 2-0 3/4
 2-0
 21


3-2 15/16
 3-0 1/2
 3-0 1/2
 3-0
 33



OCT 36

3-3 9/16
 3-0 3/4
 3-0 3/4
 3-0
 33


4-2 15/16
 4-0 3/4
 4-0 1/2
 4-0
 45



OCT 48

4-3 9/16
 4-0 3/4
 4-0 3/4
 4-0
 45

3-0 15/16
 3-0 1/2
 3-0 1/2
 3-0
 33



OCT 2436

2-3 9/16
 2-0 3/4
 2-0 3/4
 2-0
 21

NOTES:
 CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
 PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD

Pinnacle Series


DIRECT SET

ELEVATIONS : OPTIONS

SCALE: NTS

Direct Set Shapes Chart

UNITS MUST BE ORDERED BY FRAME DIMENSIONS ONLY
(AS VIEWED FROM THE EXTERIOR)

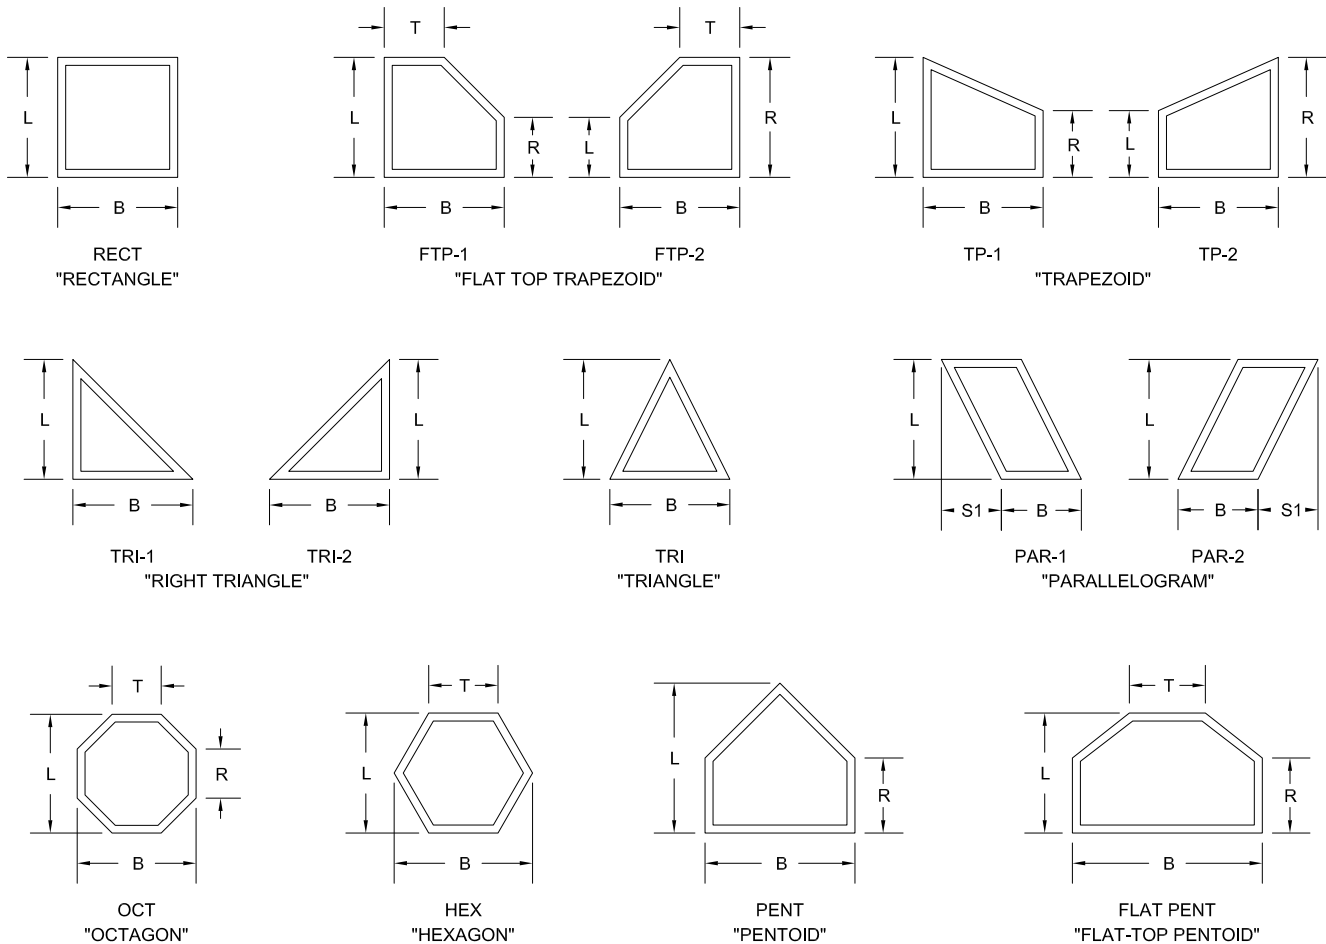

Size Limitations

1. The maximum dimension, width or height is 96 inches.
2. The minimum base dimension is 14 inches.
3. The minimum leg dimension is 6 inches.
4. The maximum Square Footage allowed is:
 - 60 Square Feet Clad
 - 48 Square Feet Primed and Legend
 - 48 Square Feet In Sash Units
5. The minimum pitch is a 5/12 angle.
6. The Aspect Ratio is 7 to 1 maximum.
7. Units 48-60 Square Feet use heat strengthened IG which may cause minor distortion.
8. Both width and height may not exceed 84" on the same units due to glass restrictions.
9. For units with obscure glass, the largest available unit is 58" x 84".
10. Any one unit can not have glass smaller than 8" x 12".
11. Some spacer may be visible on units with tight angles.