



SECTION DETAILS : OPERATING / STATIONARY SCALE: 3" = 1'-0"

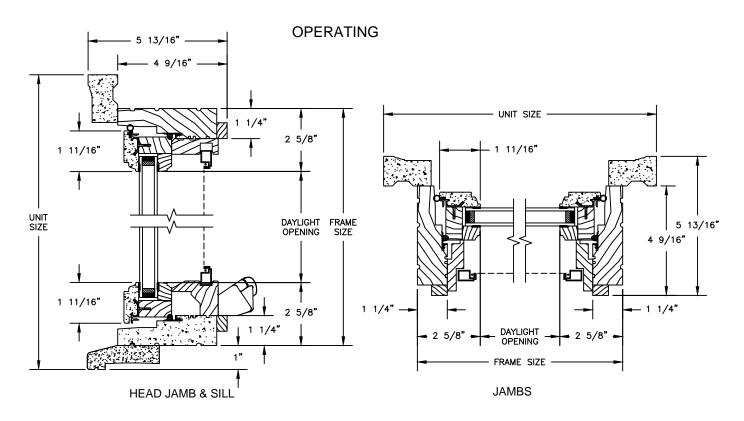

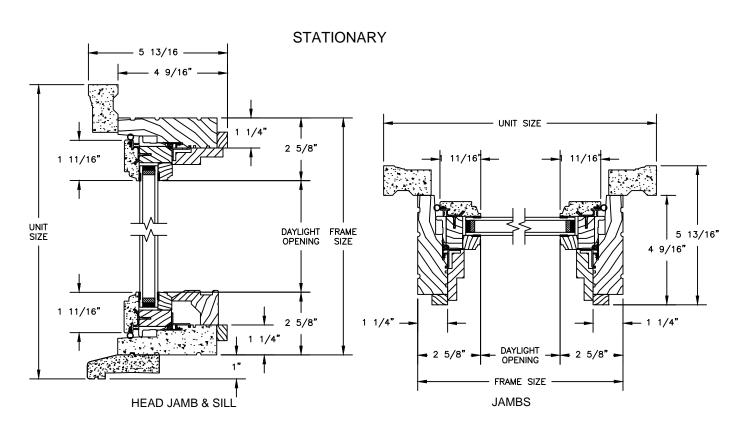


SECTION DETAILS : OPERATING / STATIONARY WITH CONTEMPORARY STOPS SCALE: 3" = 1'-0"

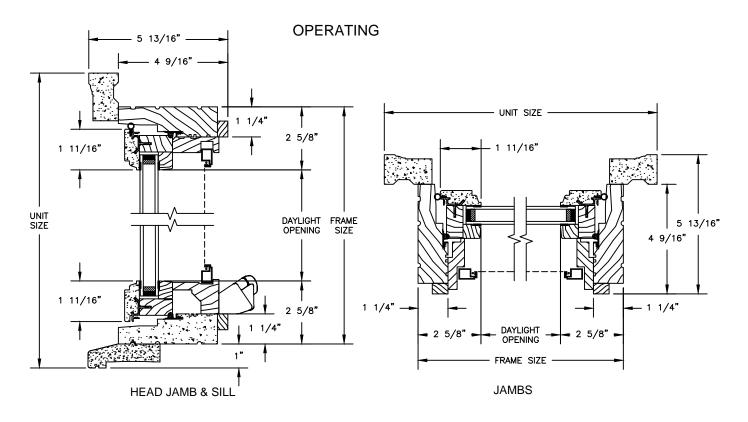

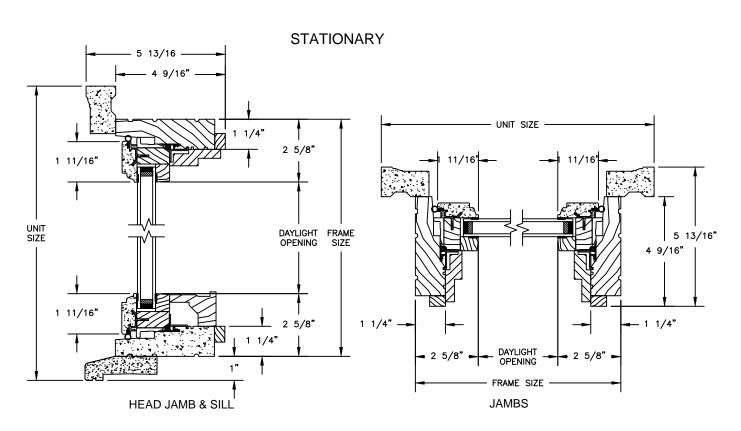


SECTION DETAILS: PICTURE


SCALE: 3" = 1'-0"

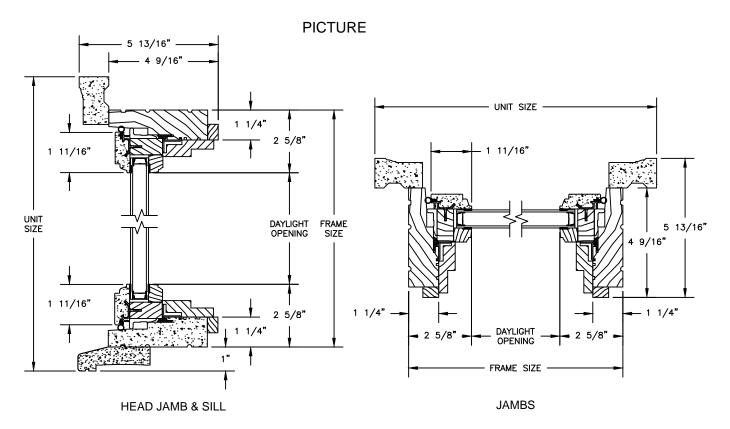


SECTION DETAILS: PICTURE WITH CONTEMPORARY STOPS

SCALE: 3" = 1'-0"

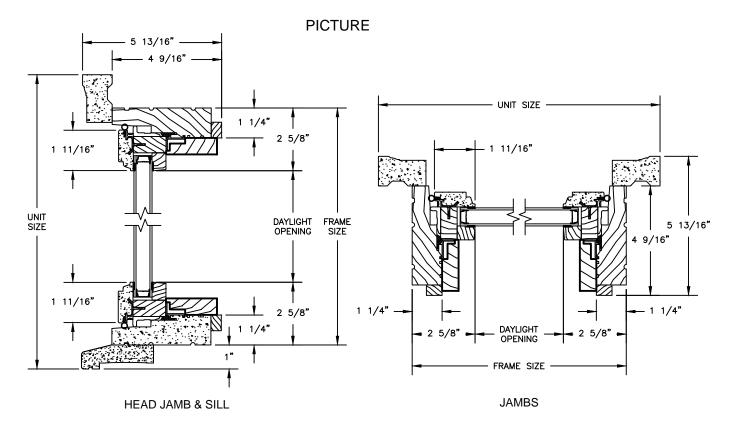


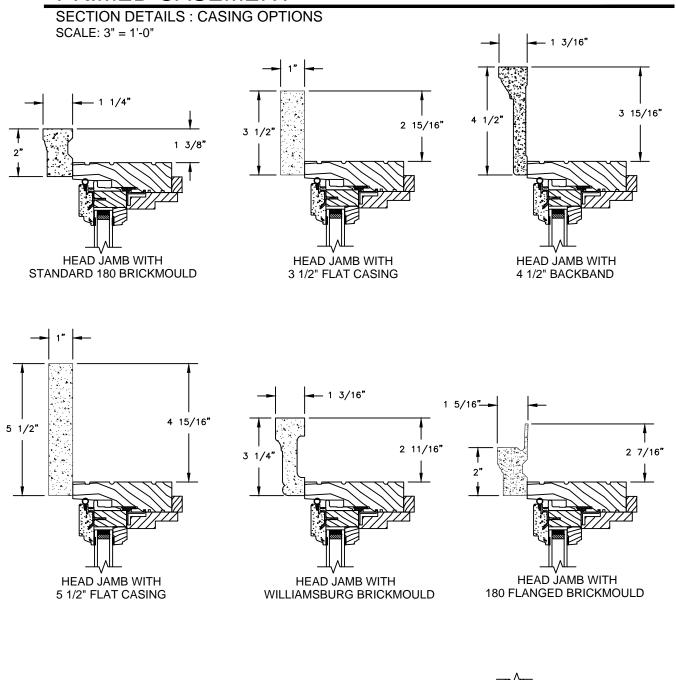

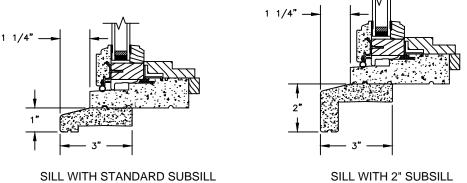


SECTION DETAILS: MULLIONS


SCALE: 3" = 1'-0"




HORIZONTAL MULLION STATIONARY/OPERATOR




VERTICAL MULLION OPERATOR/OPERATOR





VERTICAL MULLION WITH 2" SPREAD MULL OPERATOR/OPERATOR

SECTION DETAILS : GLASS STOP & DIVIDED LITE OPTIONS SCALE: 3" = 1'-0"

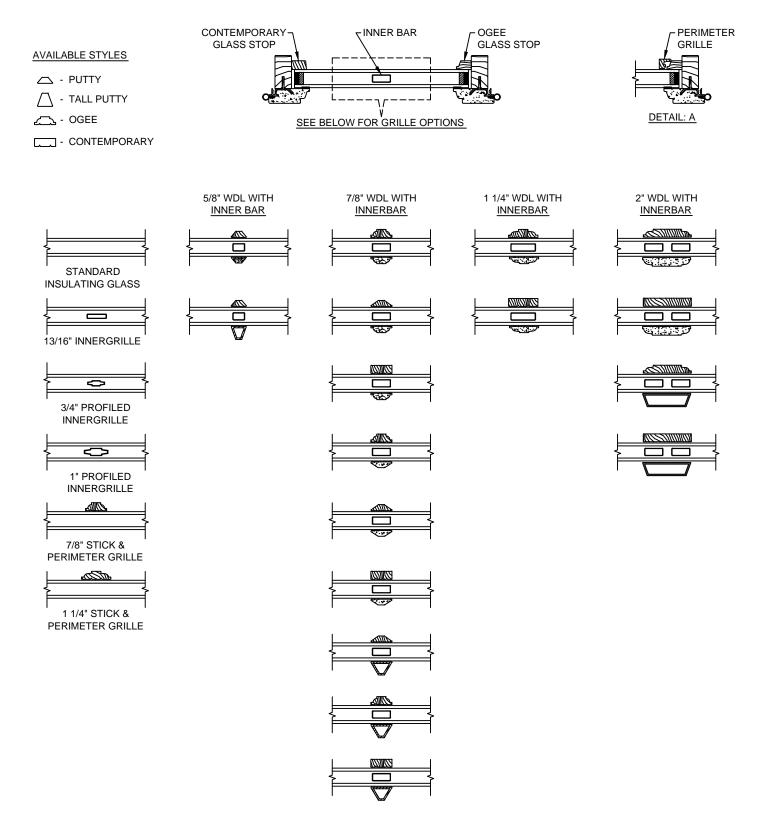


NOTE

^{*} ALL WDL OPTIONS CAN BE ORDERED WITH OR WITHOUT INNER BAR


 $^{^{\}star}$ PERIMETER GRILLES ONLY AVAILABLE IN THE 7/8" AND 1 1/4" OGEE STYLE GLASS STOP (SEE DETAIL: A)

SECTION DETAILS: CONSTRUCTION


SCALE: 2" = 1'-0"




HEAD JAMB & SILL 2 X 6 FRAME WITH SIDING



JAMBS 2 X 6 FRAME WITH SIDING



HEAD JAMB & SILL 2 X 4 FRAME WITH STUCCO




JAMBS 2 X 4 FRAME WITH STUCCO

NOTE:

THE ABOVE WALL SECTIONS REPRESENT TYPICAL WALL CONDITIONS, THESE DETAILS ARE NOT INTENDED AS INSTALLATIONS INSTRUCTIONS. PLEASE REFER TO THE INSTALLATION INSTRUCTIONS PROVIDED WITH THE PURCHASED UNITS.

SECTION DETAILS: CONSTRUCTION

SCALE: 2" = 1'-0"




MASONRY OPENING


1/4"
MIN.

1/4"

JAMBS 2 X 4 FRAME WITH BRICK VENEER

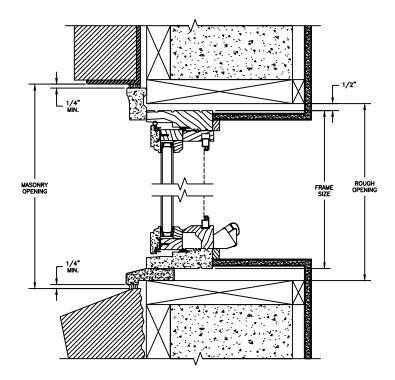

HEAD JAMB & SILL 8" CONCRETE BLOCK WALL WITH BRICK VENEER

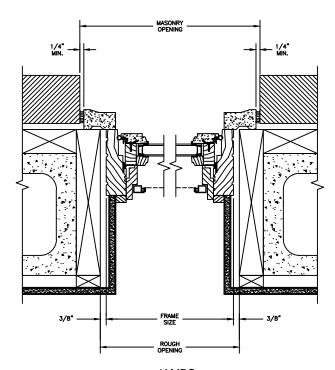


JAMBS 8" CONCRETE BLOCK WALL WITH BRICK VENEER

NOTE

THE ABOVE WALL SECTIONS REPRESENT TYPICAL WALL CONDITIONS, THESE DETAILS ARE NOT INTENDED AS INSTALLATIONS INSTRUCTIONS. PLEASE REFER TO THE INSTALLATION INSTRUCTIONS PROVIDED WITH THE PURCHASED UNITS.

SECTION DETAILS : 30/45 DEGREES BAY

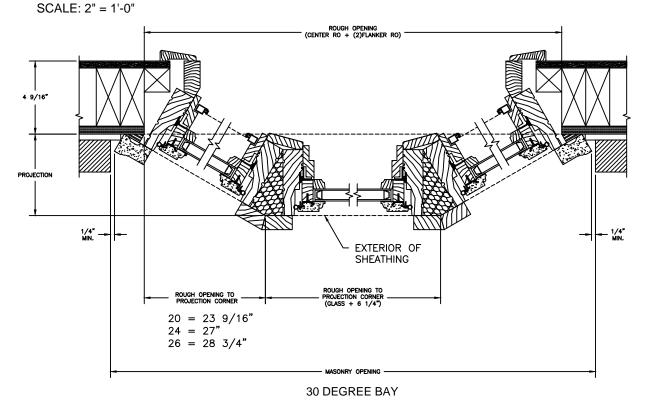

PROJECTION

ROUGH OPENING
TO PROJECTION

CORNER

20 = 20 1/16"

24 = 22 7/8"
26 = 24 5/16"

45 DEGREE BAY

MASONRY OPENING