

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING


ELEVATIONS

SCALE: 1/8" = 1'-0"


Mas. Opp. Clad
Rough Opp.
Frame
Glass

2-7	5-0 13/16	7-6 5/8	7-11 15/16	9-0 7/16	10-0 7/16
2-7	5-0 13/16	7-6 5/8	7-11 15/16	9-0 7/16	10-0 7/16
2-6 1/4	5-0 1/16	7-5 7/8	7-11 3/16	8-11 11/16	9-11 11/16
23	23	23	11 1/2 - 23 - 11 1/2	14 - 23 - 14	23


6-8
6-8
6-7 1/2
67 1/4

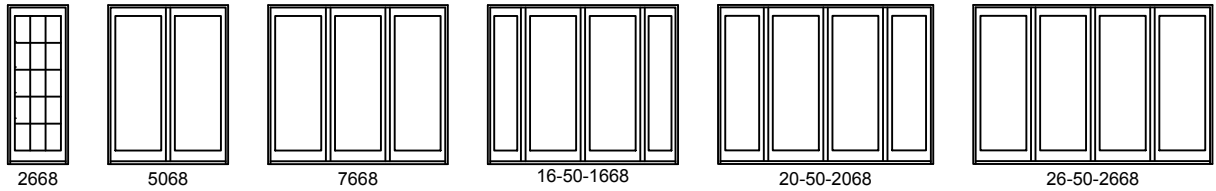

6-10 7/8
6-10 7/8
6-10 3/8
70 1/8

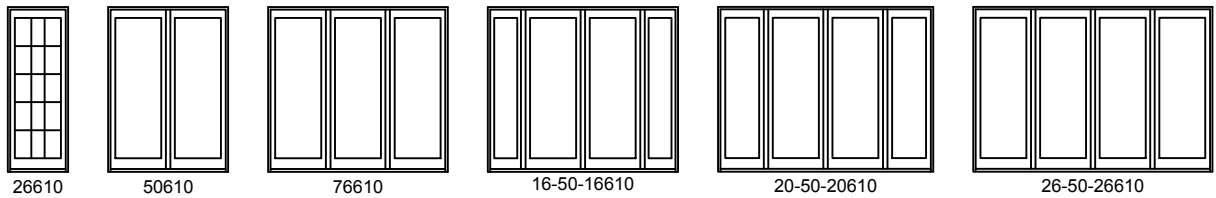


7-11 7/8
7-11 7/8
7-11 3/8
83 1/8

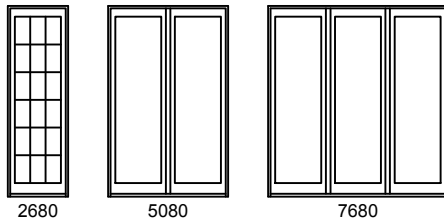

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

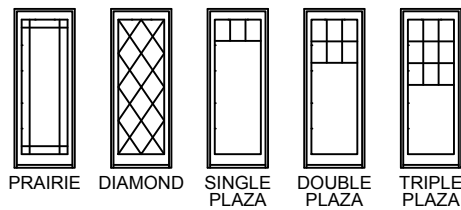

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opg. Clad						
	Rough Opg.						
	Frame						
	Glass						
		2-9	5-4 13/16	8-0 5/8	7-11 15/16		
		2-9	5-4 13/16	8-0 5/8	7-11 15/16		
		2-8 1/4	5-4 1/16	7-11 7/8	7-11 3/16		
		25	25	25	9 1/2 - 25 - 9 1/2		
6-8							
		2868	5468	8068	14-54-1468		
6-10 7/8							
		28610	54610	80610	14-54-14610		
7-11 7/8							
		2880	5480	8080			

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

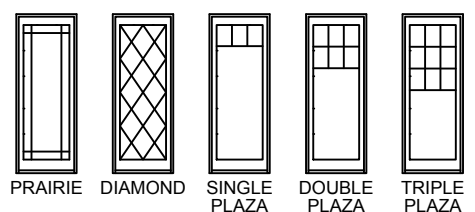

UNIT SIZE INFORMATION

- FOR CLAD BRICKMOULD**
- ADD 2 13/16" TO FRAME WIDTH
 - ADD 1 13/32" TO FRAME HEIGHT
- FOR CLAD WILLIAMSBURG**
- ADD 6 1/2" TO FRAME WIDTH
 - ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	3-1	6-0 13/16	9-0 5/8	8-3 15/16	8-7 15/16
Mass. Opg. Clad	3-1	6-0 13/16	9-0 5/8	8-3 15/16	8-7 15/16
Rough Opg.	3-0 1/4	6-0 1/16	8-11 7/8	8-3 3/16	8-7 3/16
Frame	29	29	29	7 1/2 - 29 - 7 1/2	9 1/2 - 29 - 9 1/2
Glass					
6-8					
6-8	3068	6068	9068	12-60-1268	14-60-1468
6-7 1/2					
6-7 1/2	30610	60610	90610	12-60-12610	14-60-14610
6-10 7/8					
6-10 7/8	3080	6080	9080	12-60-1280	14-60-1480
6-10 3/8					
70 1/8					
7-11 7/8					
7-11 7/8	3080	6080	9080	12-60-1280	14-60-1480
7-11 3/8					
83 1/8					

NOTE:
 THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

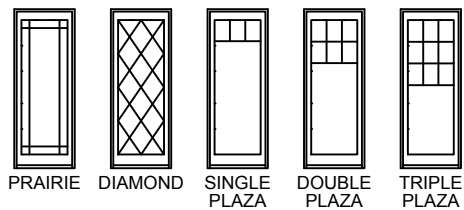

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
 CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
 ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Clad
Rough Opp.
Frame
Glass


8-11 15/16
8-11 15/16
8-11 3/16
11 1/2 - 29 - 11 1/2

10-0 7/16
10-0 7/16
9-11 11/16
17 - 29 - 17


11-0 7/16
11-0 7/16
10-11 11/16
23 - 29 - 23

11-4 7/16
11-4 7/16
11-3 11/16
25 - 29 - 25


6-8
6-8
6-7 1/2
6-7 1/4




16-60-1668



20-60-2068




26-60-2668




28-60-2868


6-10 7/8
6-10 7/8
6-10 3/8
7-0 1/8




16-60-16610



20-60-20610




26-60-26610




28-60-28610


7-11 7/8
7-11 7/8
7-11 3/8
8-0 1/8




16-60-1680



20-60-2080



26-60-2680



28-60-2880

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE PLAZA



DOUBLE PLAZA



TRIPLE PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING


ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Clad
Rough Opg.
Frame
Glass


12-0 7/16
12-0 7/16
11-11 11/16
29

6-8
6-8
6-7 1/2
67 1/4




30-60-3068

6-10 7/8
6-10 7/8
6-10 3/8
70 1/8



30-60-30610

7-11 7/8
7-11 7/8
7-11 3/8
83 1/8



30-60-30610

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.


OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE PLAZA



DOUBLE PLAZA



TRIPLE PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opn. Clad	Rough Opn.	Frame	Glass					
	3-2 1/2	6-3 13/16	8-6 15/16	8-10 15/16	9-2 15/16				
	3-2 1/2	6-3 13/16	8-6 15/16	8-10 15/16	9-2 15/16				
	3-1 3/4	6-3 1/16	8-6 3/16	8-10 3/16	9-2 3/16				
	30 1/2	30 1/2	7 1/2 - 30 1/2 - 7 1/2	9 1/2 - 30 1/2 - 9 1/2	11 1/2 - 30 1/2 - 11 1/2				
6-8									
6-8									
6-7 1/2									
67 1/4									
	3268	6468	12-64-1268	14-64-1468	16-64-1668				
6-10 7/8									
6-10 7/8									
6-10 3/8									
70 1/8									
	32610	64610	12-64-12610	14-64-14610	16-64-16610				
7-11 7/8									
7-11 7/8									
7-11 3/8									
83 1/8									
	3280	6480	12-64-1280	14-64-1480	16-64-1680				

NOTE:
 THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

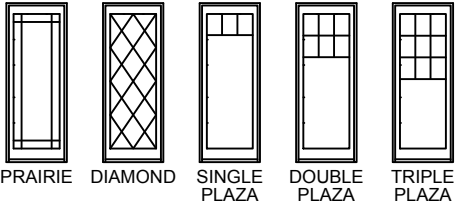

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
 CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
 ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


Mas. Opp. Clad
Rough Opp.
Frame
Glass

10-3 7/16
10-3 7/16
10-2 11/16
17 - 30 1/2 - 17


11-3 7/16
11-3 7/16
11-2 11/16
23 - 30 1/2 - 23

11-7 7/16
11-7 7/16
11-6 11/16
25 - 30 1/2 - 25


6-8
6-8
6-7 1/2
67 1/4



20-64-2068




26-64-2668




28-64-2868


6-10 7/8
6-10 7/8
6-10 3/8
70 1/8



20-64-20610




26-64-26610




28-64-28610


7-11 7/8
7-11 7/8
7-11 3/8
83 1/8



20-64-2080



26-64-2680




28-64-2880

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

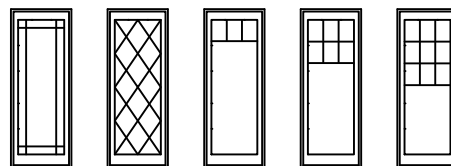

PRAIRIE DIAMOND SINGLE PLAZA DOUBLE PLAZA TRIPLE PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME




Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


Mas. Opp. Clad 4-0 3/4
 Rough Opp. 4-0 3/4
 Frame 4-0
 Glass 17



NOTE:
 THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

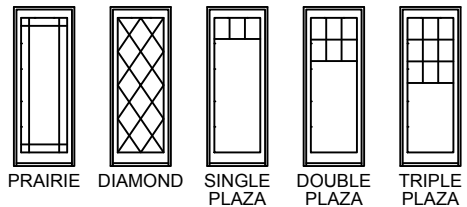

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD
 □ ADD 2 13/16" TO FRAME WIDTH
 □ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG
 □ ADD 6 1/2" TO FRAME WIDTH
 □ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
 CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
 ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - ADA NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mass. Oppg. Clad
Rough Oppg.
Frame
Glass

3-2 1/2
3-2 1/2
3-1 3/4
30 1/2

6-2 3/4
6-2 3/4
6-2
30 1/2


Mass. Oppg. Clad
Rough Oppg.
Frame
Glass

6-2 3/4
6-2 3/4
6-2
66 3/4


6-2 3/4
6-2 3/4
6-2
30 1/2

DOORS

6-6 5/8
6-6 5/8
6-6 1/8
67 1/4




3268-A




6468-A

6-9 1/2
6-9 1/2
6-9
70 1/8




32610-A




64610-A

7-10 1/2
7-10 1/2
7-10
83 1/8



3280-A



6480-A

IN-SASH TRANSOMS

1-1 1/2
1-1 1/2
1-1
6 1/2



6411-A



6411-2-A

1-4 1/2
1-4 1/2
1-4
9 1/2




6414-A




6414-2-A

2-0 1/2
2-0 1/2
2-0
17 1/2



6420-A



6420-2-A

OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE PLAZA



DOUBLE PLAZA



TRIPLE PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:

- ADA DOORS INCLUDE / REQUIRE 10" BOTTOM RAIL, 3-2 PANEL & HANDICAP SILL
- ADA DOORS ARE NOT RATED
- ADA DOORS COME WITH NO BORE & NO HARDWARE
- BI-HINGE DOORS DO NOT HAVE AN ASTRAGAL

















CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

	1-3	1-5	1-7	2-1 1/4
Mas. Opp. Clad	1-3	1-5	1-7	2-1 1/4
Rough Opp.	1-2	1-4	1-6	2-0 1/4
Frame	7 1/2	9 1/2	11 1/2	17
Glass				
6-8				
6-8	1268	1468	1668	2068
6-7 1/2				
6-11	12610	14610	16610	20610
6-11				
6-10 1/2	1280	1480	1680	2080
70 1/8				
8-0				
8-0	1280	1480	1680	2080
7-11 3/8				
83 1/8				

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:


CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING


HANDING CONFIGURATIONS (ALL HANDINGS ARE VIEWED FROM THE EXTERIOR)

SINGLE DOOR

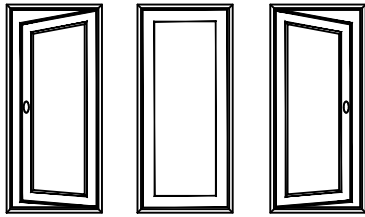


XR O XL

THREE UNIT DOOR

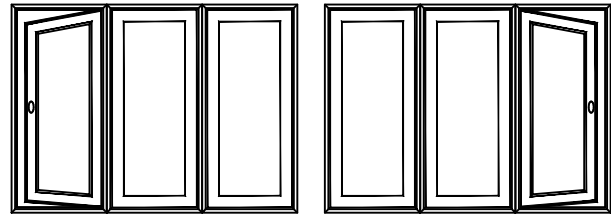


XR-O-O O-O-XL


DOUBLE UNIT DOOR

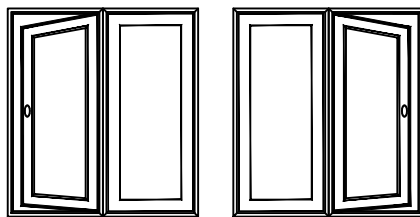


XR-O O-XL

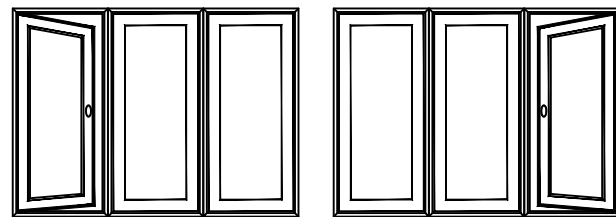

XL-O-O O-O-XR

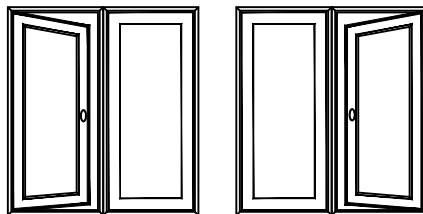


XL-O O-XR

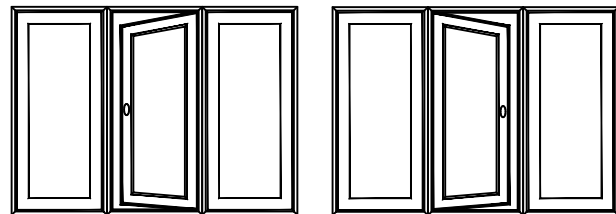


O-XR-O O-XL-O

BI-HINGE DOOR




XO OR OX

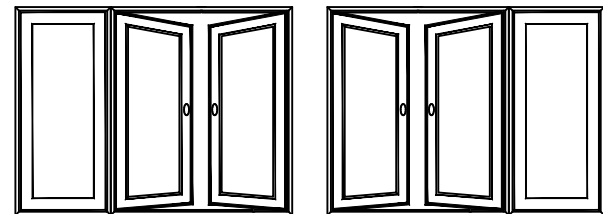


O-XO OR O-OX XO-O OR OX-O


FOUR UNIT DOOR

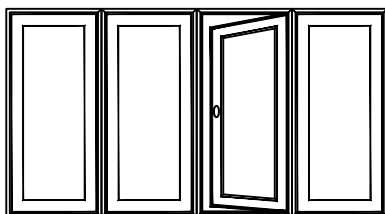

O-O-XR-O

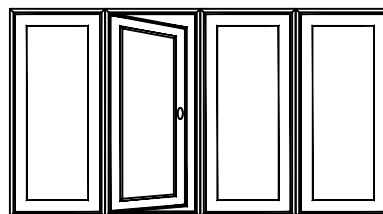

O-XL-O-O

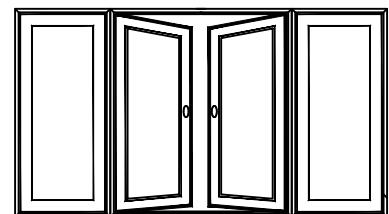

O-XO-O OR O-OX-O

FLANKER UNITS MUST BE STATIONARY FOR QUAD HANDINGS

Pinnacle Series


CLAD PATIO DOOR - NARROW INSWING

SCREEN OPTIONS


SWINGING
SCREEN OPTION

SLIDING
SCREEN OPTION


NO SCREEN AVAILABLE
(IF ORDERED AS ONE FRAME)




X-O⁺




XR^{*}




XO^{*}




O-XO⁺




O-X⁺




XL^{*}




OX^{*}




XO-O⁺




X-O-O⁺




O-O-X⁺




O-X-O⁺




O-XO-O⁺

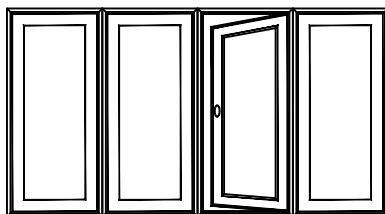

O-O-X-O⁺

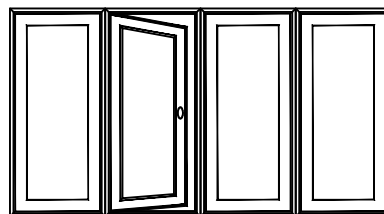

O-X-O-O⁺

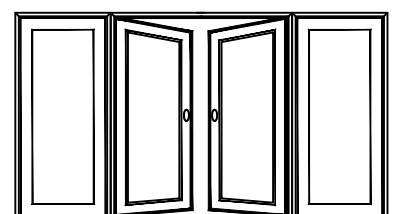

O-XO-O⁺

* Swing screens will also work on these configurations if they are mulled to other units

+ Standard handing configurations as shown are continuous head and sill. Swing screens can be applied on these units if operating doors are ordered separately and mulled to the stationary doors.

Pinnacle Series

CLAD INSWING PATIO DOOR - IN-SASH TRANSOMS

ELEVATIONS

SCALE: 1/8" = 1'-0"

		2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
Mas. Opg. Clad		2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
	Rough Opg.	2-6 1/4	5-0 1/16	5-0 1/16	7-5 7/8	7-5 7/8
	Frame	23	52 13/16	23	23	82 5/8
	Glass					
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					
17 1/2	17 1/2					
Mas. Opg. Clad		2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8
	Rough Opg.	2-8 1/4	5-4 1/16	5-4 1/16	7-11 7/8	7-11 7/8
	Frame	25	56 13/16	25	25	88 5/8
	Glass					
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					
17 1/2	17 1/2					
Mas. Opg. Clad		3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
	Rough Opg.	3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
	Frame	3-0 1/4	6-0 1/16	6-0 1/16	8-11 7/8	8-11 7/8
	Glass	29	64 13/16	29	29	100 5/8
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					
17 1/2	17 1/2					
Mas. Opg. Clad		3-2 1/2	6-3 13/16	6-4 13/16		
	Rough Opg.	3-2 1/2	6-3 13/16	6-4 13/16		
	Frame	3-1 3/4	6-3 1/16	6-4 1/16		
	Glass	31	68 13/16	31		
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	2-7	5-0 13/16	7-6 5/8	8-0 1/16	9-0 9/16	10-0 9/16
Mas. Oppg. Clad	2-7	5-0 13/16	7-6 5/8	8-0 1/16	9-0 9/16	10-0 9/16
Rough Oppg.	2-6 1/4	5-0 1/16	7-5 7/8	7-11 5/16	8-11 13/16	9-11 13/16
Frame	23	23	23	11 1/2 - 23 - 11 1/2	17 - 23 - 17	23
Glass						
6-7 1/2						
6-7 1/2	2668	5068	7668	16-50-1668	20-50-2068	26-50-2668
6-7						
67 1/4						
6-10 3/8						
6-10 3/8	26610	50610	76610	16-50-16610	20-50-20610	26-50-26610
6-9 7/8						
70 1/8						
7-11 3/8						
7-11 3/8	2680	5080	7680			
7-10 7/8						
83 1/8						

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

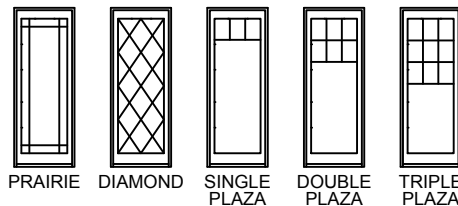

UNIT SIZE INFORMATION

- FOR CLAD BRICKMOULD**
- ▣ ADD 2 13/16" TO FRAME WIDTH
 - ▣ ADD 1 13/32" TO FRAME HEIGHT
- FOR CLAD WILLIAMSBURG**
- ▣ ADD 6 1/2" TO FRAME WIDTH
 - ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opg. Clad				
	Rough Opg.				
	Frame				
	Class				
	2-9	5-4 13/16	8-0 5/8		
	2-9	5-4 13/16	8-0 5/8		
	2-8 1/4	5-4 1/16	7-11 7/8		
	25	25	25		
6-7 1/2					
6-7 1/2					
6-7					
67 1/4					
	2868	5468	8068		
6-10 3/8					
6-10 3/8					
6-9 7/8					
70 1/8					
	28610	54610	80610		
7-11 3/8					
7-11 3/8					
7-10 7/8					
83 1/8					
	2880	5480	8080		

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

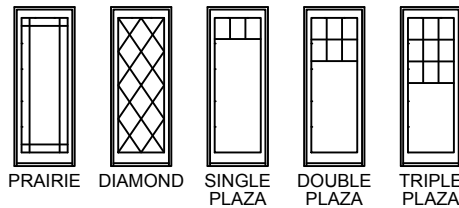

PRAIRIE DIAMOND SINGLE PLAZA DOUBLE PLAZA TRIPLE PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING
















NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	3-1	6-0 13/16	9-0 5/8	8-4 1/16	8-8 1/16
Mas. Opng. Clad	3-1	6-0 13/16	9-0 5/8	8-4 1/16	8-8 1/16
Rough Opng.	3-0 1/4	6-0 1/16	8-11 7/8	8-3 5/16	8-7 5/16
Frame	29	29	29	7 1/2 - 29 - 7 1/2	9 1/2 - 29 - 9 1/2
Glass					
6-7 1/2					
6-7 1/2	3068	6068	9068	12-60-1268	14-60-1468
6-7 1/2					
6-7 1/2					
6-10 3/8	30610	60610	90610	12-60-12610	14-60-14610
6-10 3/8					
6-9 7/8					
70 1/8					
7-11 3/8					
7-11 3/8	3080	6080	9080	12-60-1280	14-60-1480
7-11 3/8					
7-10 7/8					
83 1/8					

NOTE:
 THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

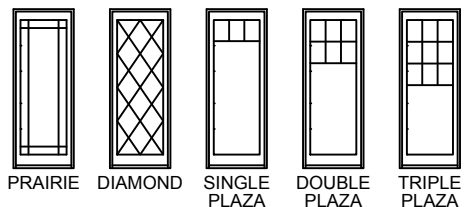

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
 CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
 ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING


ELEVATIONS

SCALE: 1/8" = 1'-0"


Mas. Opg. Clad
Rough Opg.
Frame
Glass

9-0 1/16	10-0 9/16	11-0 9/16	11-4 9/16
9-0 1/16	10-0 9/16	11-0 9/16	11-4 9/16
8-11 5/16	9-11 13/16	10-11 13/16	11-3 13/16
11 1/2 - 29 - 11 1/2	17 - 29 - 17	23 - 29 - 23	25 - 29 - 25


6-7 1/2
6-7 1/2
6-7
67 1/4

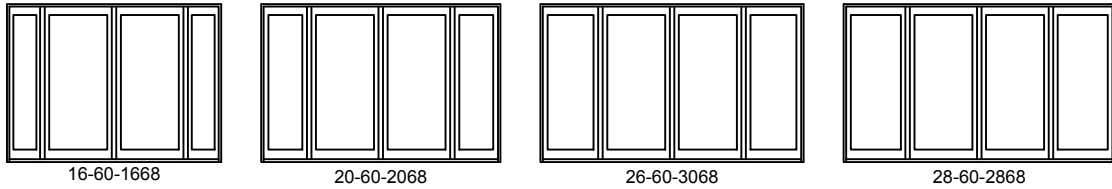

6-10 3/8
6-10 3/8
6-9 7/8
70 1/8

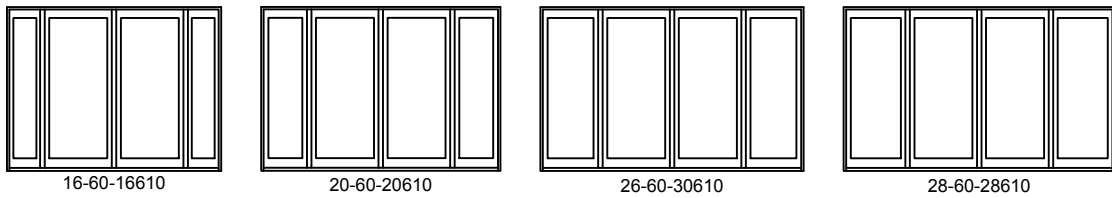


7-11 3/8
7-11 3/8
7-10 7/8
83 1/8

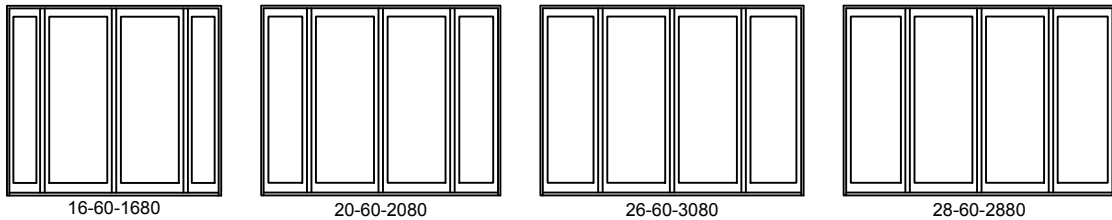

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

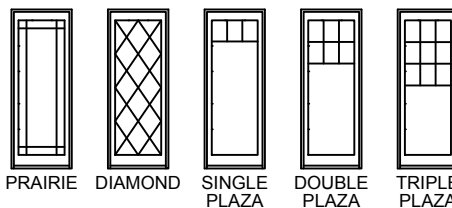

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING


ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Clad
Rough Opp.
Frame
Glass


12-0 9/16
12-0 9/16
11-11 13/16
29

6-7 1/2
6-7 1/2
6-7
67 1/4




30-30-3068

6-10 3/8
6-10 3/8
6-9 7/8
70 1/8



30-60-30610

7-11 3/8
7-11 3/8
7-10 7/8
83 1/8




30-60-3080

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

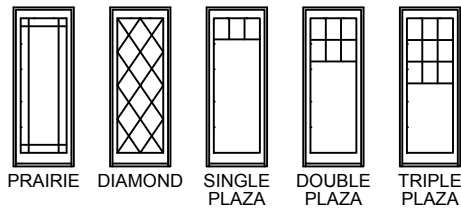

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD
 ■ ADD 2 13/16" TO FRAME WIDTH
 ■ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG
 ■ ADD 6 1/2" TO FRAME WIDTH
 ■ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Clad
Rough Opg.
Frame
Glass

3-2 1/2
3-2 1/2
3-1 3/4
30 1/2


6-3 13/16
6-3 13/16
6-3 1/16
30 1/2

8-7 1/16
8-7 1/16
8-6 5/16
7 1/2 - 30 1/2 - 7 1/2


8-11 1/16
8-11 1/16
8-10 5/16
9 1/2 - 30 1/2 - 9 1/2

9-3 1/16
9-3 1/16
9-2 5/16
11 1/2 - 30 1/2 - 11 1/2


6-7 1/2
6-7 1/2
6-7
67 1/4




3268




6468



12-64-1268




14-64-1468




16-64-1668


6-10 3/8
6-10 3/8
6-9 7/8
70 1/8




32610




64610



12-64-12610




14-64-14610




16-64-16610


7-11 3/8
7-11 3/8
7-10 7/8
83 1/8




3280




6480



12-64-1280



14-64-1480




16-64-1680

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE PLAZA



DOUBLE PLAZA



TRIPLE PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


Mas. Opp. Clad
Rough Opp.
Frame
Glass

10-3 9/16
10-3 9/16
10-2 13/16
17 - 30 1/2 - 17


11-3 9/16
11-3 9/16
11-2 13/16
23 - 30 1/2 - 23

11-7 9/16
11-7 9/16
11-6 13/16
25 - 30 1/2 - 25


6-7 1/2
6-7 1/2
6-7
67 1/4



20-64-2068




26-64-2668




28-64-2868


6-10 3/8
6-10 3/8
6-9 7/8
70 1/8



20-64-20610




26-64-26610




28-64-28610


7-11 3/8
7-11 3/8
7-10 7/8
83 1/8



20-64-2080



26-64-2680




28-64-2880

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

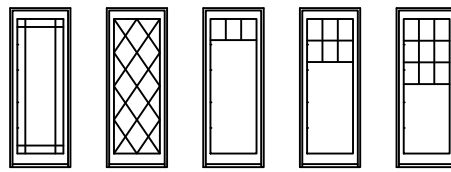

PRAIRIE DIAMOND SINGLE PLAZA DOUBLE PLAZA TRIPLE PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD
 □ ADD 2 13/16" TO FRAME WIDTH
 □ ADD 1 13/32" TO FRAME HEIGHT
 FOR CLAD WILLIAMSBURG
 □ ADD 6 1/2" TO FRAME WIDTH
 □ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING


ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opng. Clad
 Rough Opng.
 Frame
 Glass


4-0 9/16
 4-0 9/16
 4-0 1/16
 17

6-7 1/2
 6-7 1/2
 6-7
 67 1/4




4068
 BI-HINGE ONLY

6-10 3/8
 6-10 3/8
 6-9 7/8
 70 1/8



40610
 BI-HINGE ONLY

7-11 3/8
 7-11 3/8
 7-10 7/8
 83 1/8




4080
 BI-HINGE ONLY

NOTE:
 THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

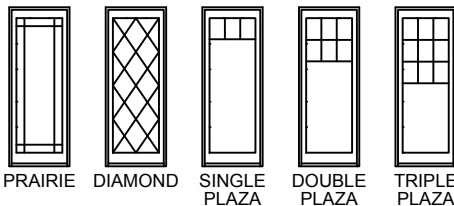

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
 CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
 ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

	1-3	1-5	1-7	2-1 1/4
Mas. Opg. Clad	1-3	1-5	1-7	2-1 1/4
Rough Opg.	1-2	1-4	1-6	2-0 1/4
Frame	7 1/2	9 1/2	11 1/2	17
Class				
6-7 1/2	1268	1468	1668	2068
6-7 1/2				
6-7				
67 1/4				
6-10 1/2	12610	14610	16610	20610
6-10 1/2				
6-9 7/8				
70 1/8				
7-11 1/2	1280	1480	1680	2080
7-11 1/2				
7-10 7/8				
83 1/8				

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:


CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series


CLAD PATIO DOOR - NARROW OUTSWING

HANDING CONFIGURATIONS (ALL HANDINGS ARE VIEWED FROM THE EXTERIOR)





SINGLE DOOR

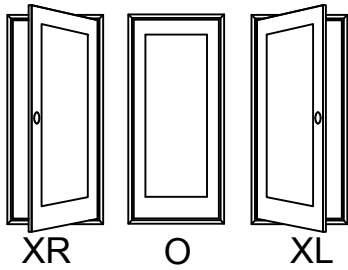



THREE UNIT DOOR

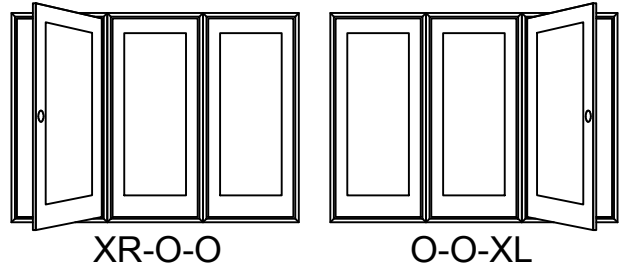




DOUBLE UNIT DOOR

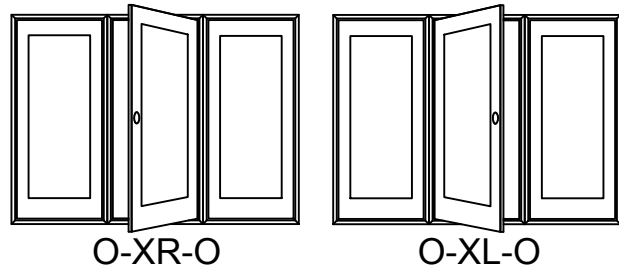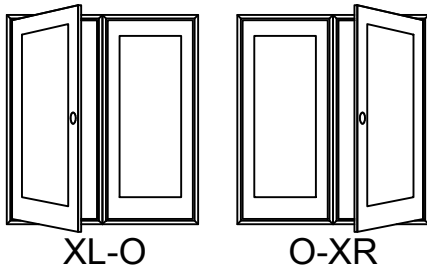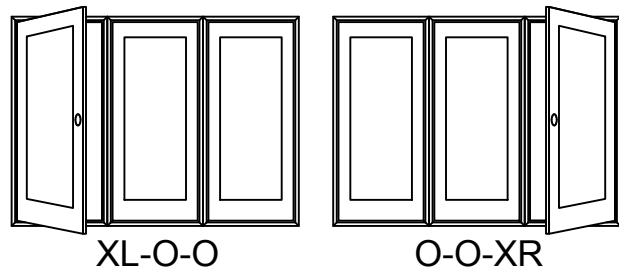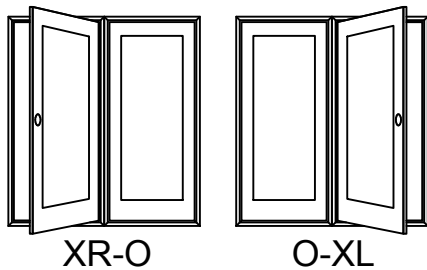

BI-HINGE DOOR

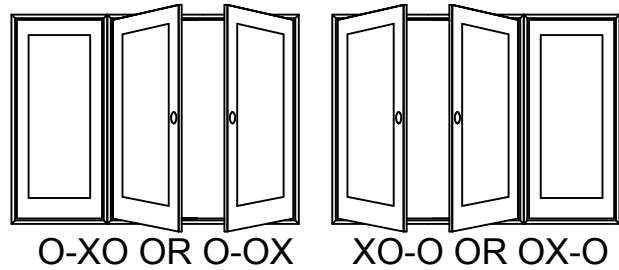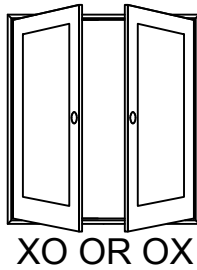

FOUR UNIT DOOR

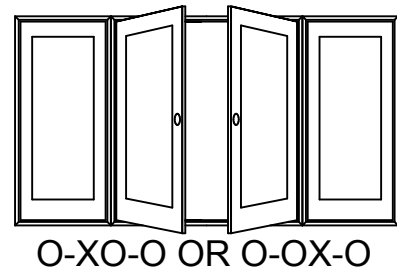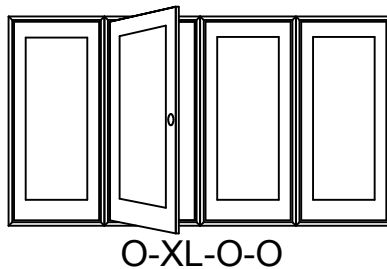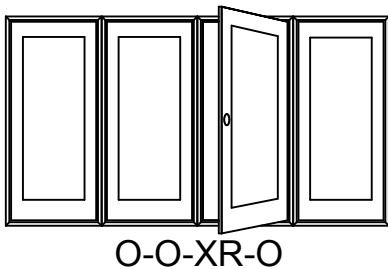

FLANKER UNITS MUST BE STATIONARY FOR QUAD HANDINGS

Pinnacle Series

CLAD OUTSWING PATIO DOOR - IN-SASH TRANSOMS

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opg. Clad	Rough Opg.	Frame	Glass					
	2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8				
	2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8				
	2-6 1/4	5-0 1/16	5-0 1/16	7-5 7/8	7-5 7/8				
	23	52 13/16	23	23	82 5/8				
1-1 1/2									
1-4 1/2									
2-0 1/2									
	2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8				
	2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8				
	2-8 1/4	5-4 1/16	5-4 1/16	7-11 7/8	7-11 7/8				
	25	56 13/16	25	25	88 5/8				
1-1 1/2									
1-4 1/2									
2-0 1/2									
	3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8				
	3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8				
	3-0 1/4	6-0 1/16	6-0 1/16	8-11 7/8	8-11 7/8				
	29	64 13/16	29	29	100 5/8				
1-1 1/2									
1-4 1/2									
2-0 1/2									
	3-2 1/2	6-3 13/16	6-3 13/16						
	3-2 1/2	6-3 13/16	6-3 13/16						
	3-1 3/4	6-3 1/16	6-3 1/16						
	31	68 13/16	31						
1-1 1/2									
1-4 1/2									
2-0 1/2									

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING