

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING


ELEVATIONS

SCALE: 1/8" = 1'-0"


Mas. Opp. Clad
Rough Opp.
Frame
Glass

2-7	5-0 13/16	7-6 5/8	7-11 15/16	9-0 7/16	10-0 7/16
2-7	5-0 13/16	7-6 5/8	7-11 15/16	9-0 7/16	10-0 7/16
2-6 1/4	5-0 1/16	7-5 7/8	7-11 3/16	8-11 11/16	9-11 11/16
23	23	23	11 1/2 - 23 - 11 1/2	14 - 23 - 14	23


6-8
6-8
6-7 1/2
67 1/4

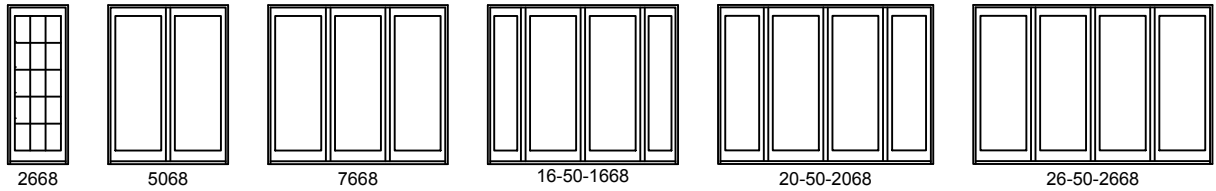

6-10 7/8
6-10 7/8
6-10 3/8
70 1/8

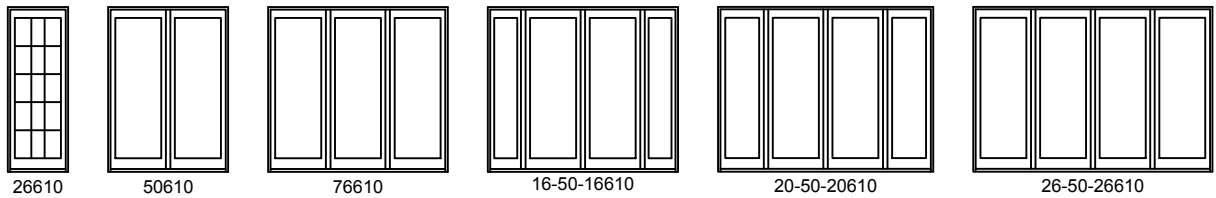


7-11 7/8
7-11 7/8
7-11 3/8
83 1/8

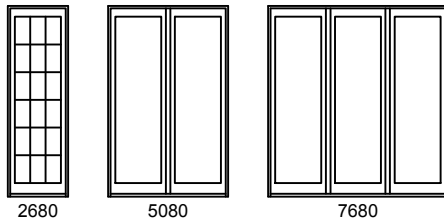

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

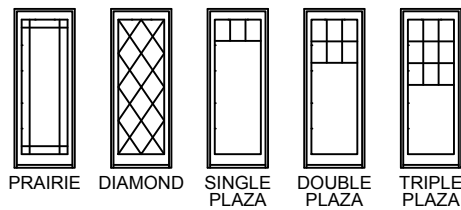

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series












CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Clad
Rough Opp.
Frame
Glass


2-9	5-4 13/16	8-0 5/8	7-11 15/16
2-9	5-4 13/16	8-0 5/8	7-11 15/16
2-8 1/4	5-4 1/16	7-11 7/8	7-11 3/16
25	25	25	9 1/2 - 25 - 9 1/2

6-8 6-8 6-7 1/2 6-7 1/4				
	2868	5468	8068	14-54-1468
6-10 7/8 6-10 7/8 6-10 3/8 7-0 1/8				
	28610	54610	80610	14-54-14610
7-11 7/8 7-11 7/8 7-11 3/8 8-3 1/8				
	2880	5480	8080	

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

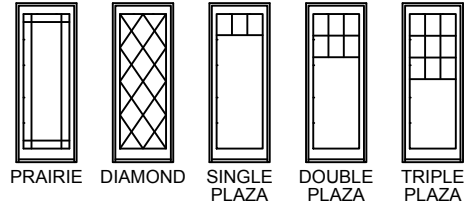

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


Mass. Opg. Clad
Rough Opg.
Frame
Glass

	3-1	6-0 13/16	9-0 5/8	8-11 15/16	10-0 7/16
	3-1	6-0 13/16	9-0 5/8	8-11 15/16	10-0 7/16
	3-0 1/4	6-0 1/16	8-11 7/8	8-11 3/16	9-11 11/16
	29	29	29	11 1/2 - 29 - 11 1/2	17 - 29 - 17
6-8					
6-8					
6-7 1/2					
6-7 1/4					
	3068	6068	9068	16-60-1668	20-60-2068
6-10 7/8					
6-10 7/8					
6-10 3/8					
70 1/8					
	30610	60610	90610	16-60-16610	20-60-20610
7-11 7/8					
7-11 7/8					
7-11 3/8					
83 1/8					
	3080	6080	9080		

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

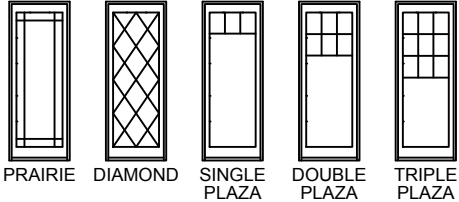

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Clad
Rough Opp.
Frame
Glass

11-0 7/16

12-0 7/16

11-0 7/16

12-0 7/16


10-11 11/16

11-11 11/16


23 - 29 - 23

29

6-8
6-8
6-7 1/2
67 1/4




26-60-2668




30-60-3068

6-10 7/8
6-10 7/8
6-10 3/8
70 1/8



26-60-26610



30-60-30610

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.


OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE
PLAZA



DOUBLE
PLAZA



TRIPLE
PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:










CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

Mas. Opq. Clad	3-2 1/2	6-3 13/16	4-0 3/4
Rough Opq.	3-2 1/2	6-3 13/16	4-0 3/4
Frame	3-1 3/4	6-3 1/16	4-0
Glass	30 1/2	30 1/2	17
6-8 6-8 6-7 1/2 67 1/4	 3268	 6468	 4068 BI-HINGE ONLY
6-10 7/8 6-10 7/8 6-10 3/8 70 1/8	 32610	 64610	 40610 BI-HINGE ONLY
7-11 7/8 7-11 7/8 7-11 3/8 83 1/8	 3280	 6480	 4080 BI-HINGE ONLY

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 1 3/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

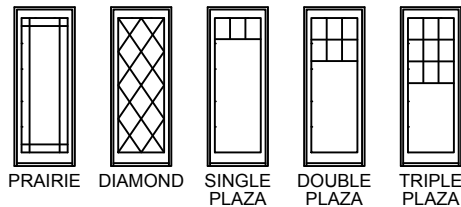

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING













NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

	1-3	1-5	1-7	2-1 1/4
Mas. Oppg. Clad	1-3	1-5	1-7	2-1 1/4
Rough Oppg.	1-2	1-4	1-6	2-0 1/4
Frame	7 1/2	9 1/2	11 1/2	17
Glass				
6-8				
6-8	1268	1468	1668	2068
6-7 1/2				
6-11	12610	14610	16610	20610
6-11				
6-10 1/2	1280	1480	1680	2080
7-11 3/8				
8-0				
8-0				
7-11 3/8				
83 1/8				

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:


CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW INSWING


HANDING CONFIGURATIONS (ALL HANDINGS ARE VIEWED FROM THE EXTERIOR)

SINGLE DOOR

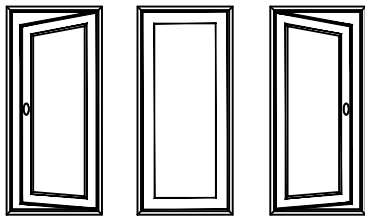


XR O XL

THREE UNIT DOOR

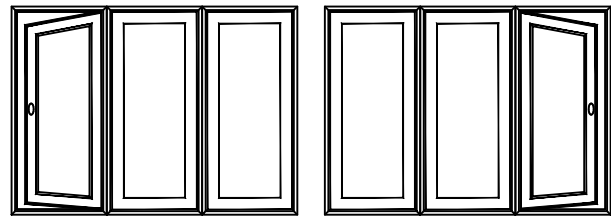


XR-O-O O-O-XL


DOUBLE UNIT DOOR

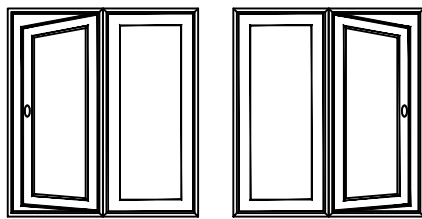


XR-O O-XL

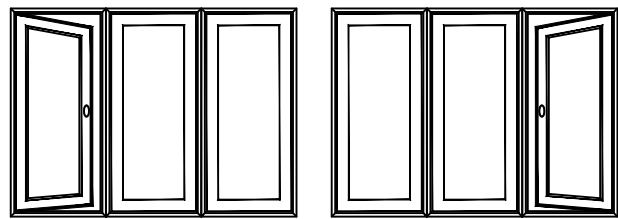

XL-O-O O-O-XR

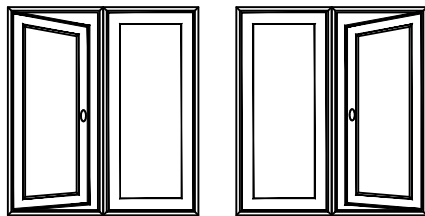


XL-O O-XR

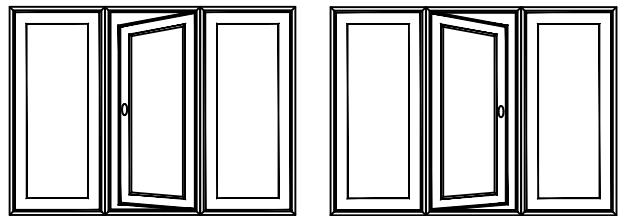


O-XR-O O-XL-O

BI-HINGE DOOR




XO OR OX

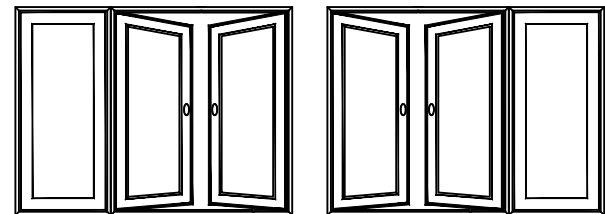


O-XO OR O-OX XO-O OR OX-O


FOUR UNIT DOOR

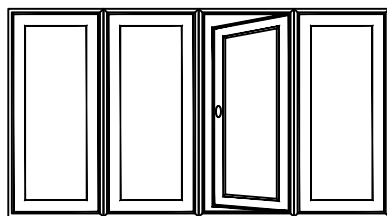

O-O-XR-O

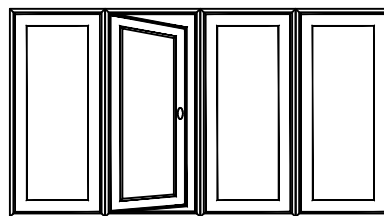

O-XL-O-O

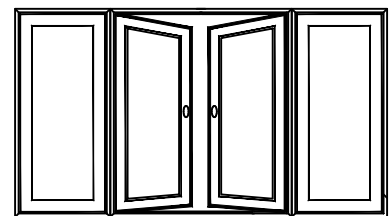

O-XO-O OR O-OX-O

FLANKER UNITS MUST BE STATIONARY FOR QUAD HANDINGS

Pinnacle Series


CLAD PATIO DOOR - NARROW INSWING

SCREEN OPTIONS


SWINGING
SCREEN OPTION

SLIDING
SCREEN OPTION


NO SCREEN AVAILABLE
(IF ORDERED AS ONE FRAME)




X-O⁺




XR^{*}




XO^{*}




O-XO⁺




O-X⁺




XL^{*}




OX^{*}




XO-O⁺




X-O-O⁺




O-O-X⁺




O-X-O⁺




O-XO-O⁺

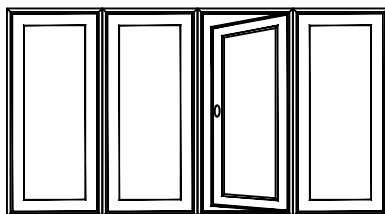

O-O-X-O⁺

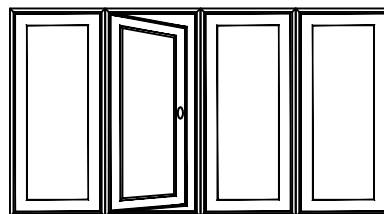

O-X-O-O⁺

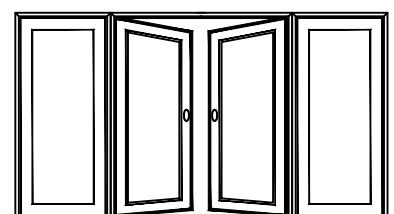

O-XO-O⁺

* Swing screens will also work on these configurations if they are mulled to other units

+ Standard handing configurations as shown are continuous head and sill. Swing screens can be applied on these units if operating doors are ordered separately and mulled to the stationary doors.

Pinnacle Series

CLAD INSWING PATIO DOOR - IN-SASH TRANSOMS

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opg. Clad					
	Rough Opg.					
	Frame					
	Glass					
		2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
		2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
		2-6 1/4	5-0 1/16	5-0 1/16	7-5 7/8	7-5 7/8
		23	52 13/16	23	23	82 5/8
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					
		2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8
		2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8
		2-8 1/4	5-4 1/16	5-4 1/16	7-11 7/8	7-11 7/8
		25	56 13/16	25	25	88 5/8
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					
		3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
		3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
		3-0 1/4	6-0 1/16	6-0 1/16	8-11 7/8	8-11 7/8
		29	64 13/16	29	29	100 5/8
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					
		3-2 1/2	6-3 13/16	6-4 13/16		
		3-2 1/2	6-3 13/16	6-4 13/16		
		3-1 3/4	6-3 1/16	6-4 1/16		
		31	68 13/16	31		
1-1 1/2	1-1 1/2					
1-4 1/2	1-4 1/2					
2-0 1/2	2-0 1/2					

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opng. Clad	2-7	5-0 13/16	7-6 5/8	8-0 1/16	9-0 9/16	10-0 9/16
	Rough Opng.	2-7	5-0 13/16	7-6 5/8	8-0 1/16	9-0 9/16	10-0 9/16
	Frame	2-6 1/4	5-0 1/16	7-5 7/8	7-11 5/16	8-11 13/16	9-11 13/16
	Glass	23	23	23	11 1/2 - 23 - 11 1/2	17 - 23 - 17	23
6-7 1/2							
6-7 1/2							
6-7 1/4							
6-10 3/8							
6-10 3/8							
6-9 7/8							
7-10 1/8							
7-11 3/8							
7-11 3/8							
7-10 7/8							
83 1/8							

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

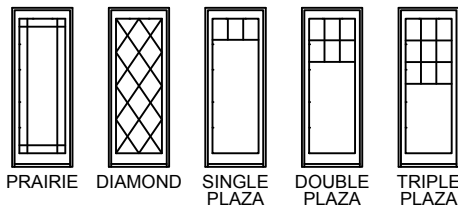

UNIT SIZE INFORMATION

- FOR CLAD BRICKMOULD**
- ADD 2 13/16" TO FRAME WIDTH
 - ADD 1 13/32" TO FRAME HEIGHT
- FOR CLAD WILLIAMSBURG**
- ADD 6 1/2" TO FRAME WIDTH
 - ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas.	Oppg.	Clad			
	Rough	Oppg.	Frame			
	Opng.	Opng.	Opng.			
	Class	Class	Class			
	2-9	5-4 13/16	8-0 5/8			
	2-9	5-4 13/16	8-0 5/8			
	2-8 1/4	5-4 1/16	7-11 7/8			
	25	25	25			
6-7 1/2						
6-7 1/2				2868	5468	8068
6-7						
67 1/4						
6-10 3/8						
6-10 3/8				28610	54610	80610
6-9 7/8						
70 1/8						
7-11 3/8						
7-11 3/8				2880	5480	8080
7-10 7/8						
83 1/8						

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

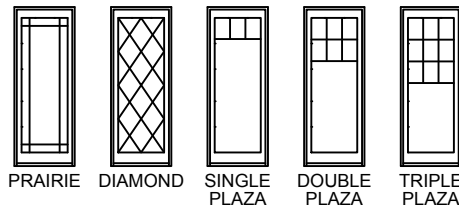

PRAIRIE DIAMOND SINGLE PLAZA DOUBLE PLAZA TRIPLE PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS


SCALE: 1/8" = 1'-0"

	Mas. Opg. Clad	3-1	6-0 13/16	9-0 5/8	9-0 1/16	10-0 9/16
	Rough Opg.	3-1	6-0 13/16	9-0 5/8	9-0 1/16	10-0 9/16
	Frame	3-0 1/4	6-0 1/16	8-11 7/8	8-11 5/16	9-11 13/16
	Glass	29	29	29	11 1/2 - 29 - 11 1/2	17 - 29 - 17
6-7 1/2						
6-7 1/2		3068	6068	9068	16-60-1668	20-60-2068
6-7 1/4						
6-10 3/8						
6-10 3/8		30610	60610	90610	16-60-16610	20-60-20610
6-9 7/8						
70 1/8						
7-11 3/8						
7-11 3/8		3080	6080	9080		
7-10 7/8						
83 1/8						

NOTE:
 THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

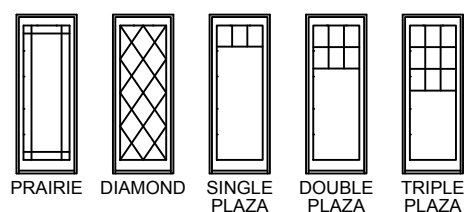

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
 CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
 ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Clad
Rough Opg.
Frame
Glass

11-0 9/16

12-0 9/16

11-0 9/16

12-0 9/16


10-11 13/16

11-11 13/16


23 - 29 - 23

29

6-7 1/2
6-7 1/2
6-7
67 1/4




26-60-3068




30-30-3068

6-10 3/8
6-10 3/8
6-9 7/8
70 1/8



26-60-30610



30-60-30610

NOTE:

THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE PLAZA



DOUBLE PLAZA



TRIPLE PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"


	Mas. Opg. Clad	Rough Opg.	Frame	Glass
	3-2 1/2	6-3 13/16	4-0 9/16	
	3-2 1/2	6-3 13/16	4-0 9/16	
	3-1 3/4	6-3 1/16	4-0 1/16	
	30 1/2	30 1/2	17	

6-7 1/2 6-7 1/2 6-7 67 1/4			
	3268	6468	4068 BI-HINGE ONLY
	6-10 3/8 6-10 3/8 6-9 7/8 70 1/8		
32610		64610	40610 BI-HINGE ONLY
7-11 3/8 7-11 3/8 7-10 7/8 83 1/8			
	3280	6480	4080 BI-HINGE ONLY

NOTE:
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

FOR DOORS WITH HANDICAP SILL, SUBTRACT 7/8" FROM FRAME & ROUGH OPENING HEIGHTS.

OTHER GRILLE PATTERNS

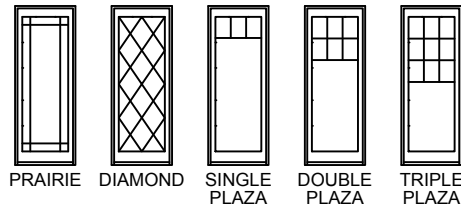

UNIT SIZE INFORMATION

- FOR CLAD BRICKMOULD**
- ▣ ADD 2 13/16" TO FRAME WIDTH
 - ▣ ADD 1 13/32" TO FRAME HEIGHT
- FOR CLAD WILLIAMSBURG**
- ▣ ADD 6 1/2" TO FRAME WIDTH
 - ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - ADA NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mass. Oppg. Clad
Rough Oppg.
Frame
Glass

3-2 1/2
3-2 1/2
3-1 3/4
30 1/2

6-2 3/4
6-2 3/4
6-2
30 1/2


Mass. Oppg. Clad
Rough Oppg.
Frame
Glass

6-2 3/4
6-2 3/4
6-2
66 3/4


6-2 3/4
6-2 3/4
6-2
30 1/2

DOORS

6-6 5/8
6-6 5/8
6-6 1/8
67 1/4




3268-A




6468-A

6-9 1/2
6-9 1/2
6-9
70 1/8




32610-A




64610-A

7-10 1/2
7-10 1/2
7-10
83 1/8



3280-A



6480-A

IN-SASH TRANSOMS

1-1 1/2
1-1 1/2
1-1
6 1/2




6411-A




6411-2-A

1-4 1/2
1-4 1/2
1-4
9 1/2



6414-A




6414-2-A

2-0 1/2
2-0 1/2
2-0
17 1/2



6420-A



6420-2-A

OTHER GRILLE PATTERNS




PRAIRIE




DIAMOND



SINGLE
PLAZA



DOUBLE
PLAZA



TRIPLE
PLAZA

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

- ADA DOORS INCLUDE / REQUIRE 10" BOTTOM RAIL, 3-2 PANEL & HANDICAP SILL
- ADA DOORS ARE NOT RATED
- ADA DOORS COME WITH NO BORE & NO HARDWARE
- BI-HINGE DOORS DO NOT HAVE AN ASTRAGAL













CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series

CLAD PATIO DOOR - NARROW OUTSWING

ELEVATIONS

SCALE: 1/8" = 1'-0"

	1-3	1-5	1-7	2-1 1/4
Mas. Opp. Clad	1-3	1-5	1-7	2-1 1/4
Rough Opp.	1-2	1-4	1-6	2-0 1/4
Frame	7 1/2	9 1/2	11 1/2	17
Glass				
6-7 1/2				
6-7 1/2	1268	1468	1668	2068
6-7 1/4				
67 1/4				
6-10 1/2				
6-10 1/2	12610	14610	16610	20610
6-9 7/8				
70 1/8				
7-11 1/2				
7-11 1/2	1280	1480	1680	2080
7-10 7/8				
83 1/8				

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:


CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
ALL UNITS LISTED ARE BUILT AS ONE FRAME

Pinnacle Series


CLAD PATIO DOOR - NARROW OUTSWING

HANDING CONFIGURATIONS (ALL HANDINGS ARE VIEWED FROM THE EXTERIOR)





SINGLE DOOR





THREE UNIT DOOR

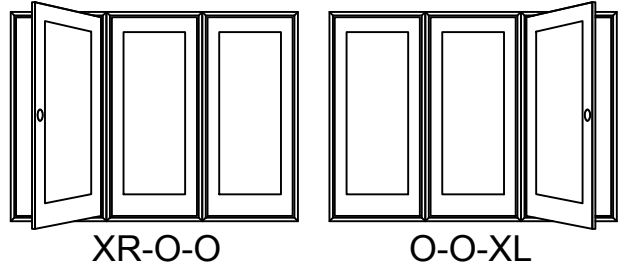




DOUBLE UNIT DOOR

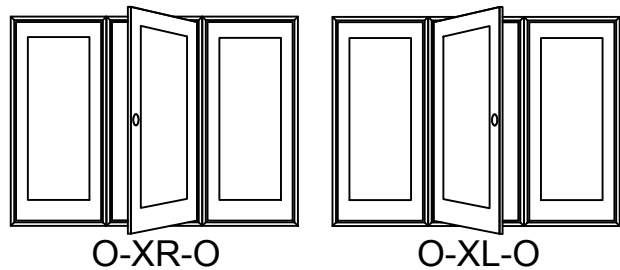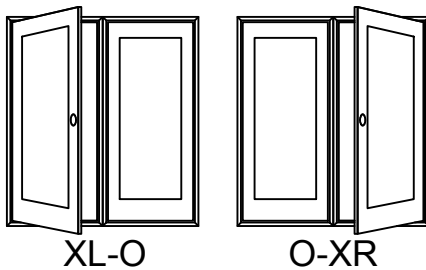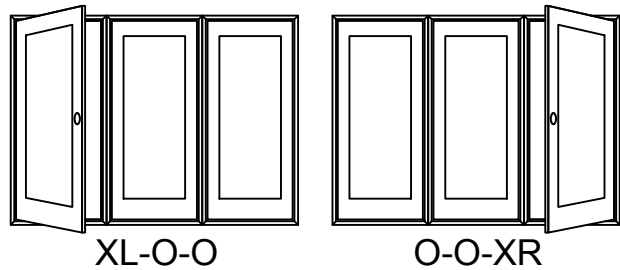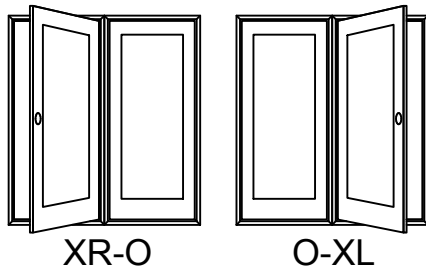

BI-HINGE DOOR

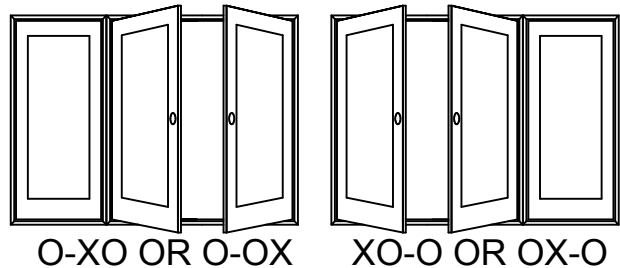

FOUR UNIT DOOR

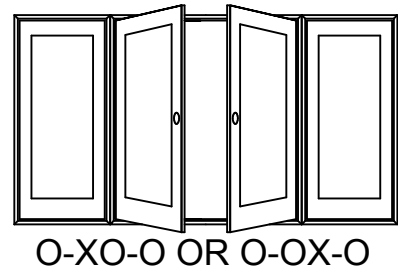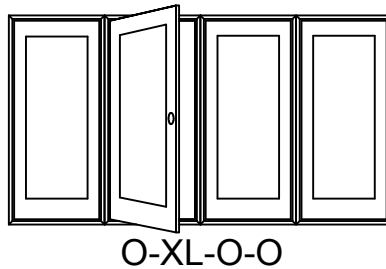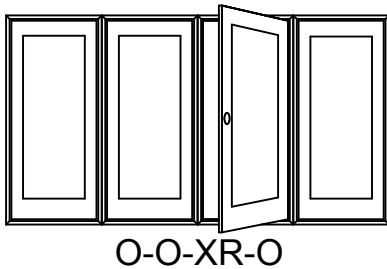

FLANKER UNITS MUST BE STATIONARY FOR QUAD HANDINGS

Pinnacle Series

CLAD OUTSWING PATIO DOOR - IN-SASH TRANSOMS

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Clad Rough Opg. Frame Glass	2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
	2-7	5-0 13/16	5-0 13/16	7-6 5/8	7-6 5/8
	2-6 1/4	5-0 1/16	5-0 1/16	7-5 7/8	7-5 7/8
	23	52 13/16	23	23	82 5/8
1-4 1/2					
1-4 1/2	2611	5011	5011-2	7611-3	
1-4 1/2					
1-4 1/2	2614	5014	5014-2	7614-3	7614
2-0 1/2					
2-0 1/2	2620	5020	5020-2	7620-3	7620
Mas. Opg. Clad Rough Opg. Frame Glass	2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8
	2-9	5-4 13/16	5-4 13/16	8-0 5/8	8-0 5/8
	2-8 1/4	5-4 1/16	5-4 1/16	7-11 7/8	7-11 7/8
	25	56 13/16	25	25	88 5/8
1-4 1/2					
1-4 1/2	2811	5411	5411-2	8011-3	
1-4 1/2					
1-4 1/2	2814	5414	5414-2	8014-3	8014
2-0 1/2					
2-0 1/2	2820	5420	5420-2	8020-3	8020
Mas. Opg. Clad Rough Opg. Frame Glass	3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
	3-1	6-0 13/16	6-0 13/16	9-0 5/8	9-0 5/8
	3-0 1/4	6-0 1/16	6-0 1/16	8-11 7/8	8-11 7/8
	29	64 13/16	29	29	100 5/8
1-4 1/2					
1-4 1/2	3011	6011	6011-2	9011-3	
1-4 1/2					
1-4 1/2	3014	6014	6014-2	9014-3	9014
2-0 1/2					
2-0 1/2	3020	6020	6020-2	9020-3	9020
Mas. Opg. Clad Rough Opg. Frame Glass	3-2 1/2	6-3 13/16	6-3 13/16		
	3-2 1/2	6-3 13/16	6-3 13/16		
	3-1 3/4	6-3 1/16	6-3 1/16		
	31	68 13/16	31		
1-4 1/2					
1-4 1/2	3211	6411	6411-2		
1-4 1/2					
1-4 1/2	3214	6414	6414-2		
2-0 1/2					
2-0 1/2	3220	6420	6420-2		

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING