







Pinnacle Impact Series

PATIO DOOR - FRENCH SLIDER

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opp. Clad	2-8 3/4	4-11 3/4
	Rough Opp.	2-8 3/4	4-11 3/4
	Frame	2-8	4-11
	Glass	21 1/4	21 1/4
6-8			
		2668-S	5068-OX
6-11			
		26610-S	50610-OX
8-0			
		2680-S	5080-OX

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT


FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

OTHER GRILLE PATTERNS

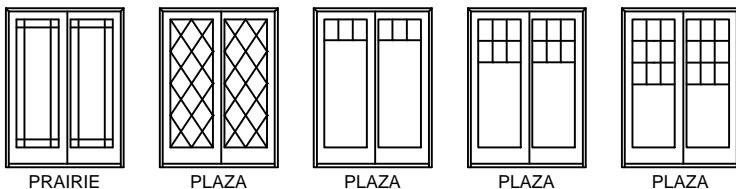

NOTES:







CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
 PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD

Pinnacle Impact Series

PATIO DOOR - FRENCH SLIDER

ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opp. Clad	3-2 3/4	5-11 3/4
	Rough Opp.	3-2 3/4	5-11 3/4
	Frame	3-2	5-11
	Glass	27 1/4	27 1/4
6-8	6-8		
	6-7 1/2	3068-S	6068-OX
6-11	6-11		
	6-10 1/2	30610-S	60610-OX
8-0	8-0		
	7-11 1/2	3080-S	6080-OX

UNIT SIZE INFORMATION

FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT


FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

OTHER GRILLE PATTERNS

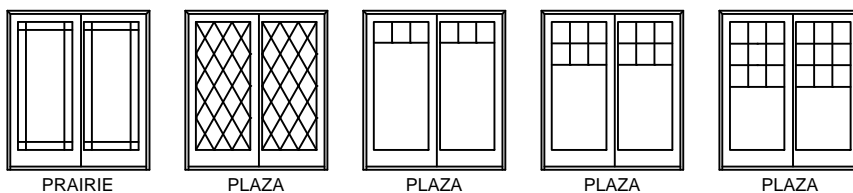

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD